

SFB



嘉善宝林轴承有限公司
JIASHAN SFB BEARING CO., LTD.



**JIASHAN SFB
BEARING CO., LTD.**

企业简介

Introduction

嘉善宝林轴承有限公司是一家专业致力于滑动轴承的开发、生产和销售的企业。企业位于素有鱼米之乡美称的浙江省嘉善县境内，东距上海虹桥机场60公里，西距杭州100公里，北临苏州80公里。地理位置优越，交通极其便捷。

本企业作为一家现代化滑动轴承的生产企业。主要生产SFB-500固体镶嵌润滑轴承、SFB-090青铜卷制轴承、SFB-800双金属轴承、SFB-10自润滑复合轴承、SFB-20边界润滑轴承、SFB-FZ钢球保持架、SFB-FR四氟软带、SFB-FD含铜四氟带、SFB-FU含油粉末冶金等滑动轴承。广泛用于汽车、电子、机械机床、模具、冶金机器、矿山机械、纺织机械、起重机械、建筑机械、印刷机械、农林水利机械，工程机械、注塑机、橡胶机械，化工机械、食品机械，自动化设备，锻压设备、轧钢设备、健身器械、港口及海洋机械等领域。80%以上出口欧美、日韩等国家和地区，也为国内各大厂商配套。

本企业技术力量雄厚、生产工艺先进、检测设备完善，有健全的质量保证体系，产品符合ISO标准，质量稳定可靠。

企业本着“诚信为本，质量第一”的理念，不断改进产品质量，不断开发新产品，来满足不同市场需求。竭诚与各界朋友合作、共谋发展。

热忱欢迎国内外新老客商洽谈合作！


Jiashan SFB Bearing Co., Ltd. devote to developing, producing and selling sliding bearing. SFB has the convenient traffic. we located in Jiashan county, Zhejiang province which next to shanghai Hong qiao airport.

SFB strive to be a leading manufacturer of sliding bearing. We focus on SFB-500 Solid Lubricant Inlaid Bearing, SFB-090 wrapped bronze bushing, SFB-800 bimetal bushing, SFB-10 self-lubricating composite bushing, SFB-20 boundary lubricating bushing, SFB-FZ ball retainer bearing, SFB-FR PTFE soft belt, SFB-FD copper containing PTFE tape, SFB-FU Solid Lubricant Inlaid Bearing etc. Our products are widely used in automobile, electronics, Mechanical machine tool, mold, metallurgical machinery, mining machinery, textile machinery, hoisting machinery, construction machinery, Printing machinery, agriculture and water conservancy machinery, engineering machinery, injection molding machine, rubber machinery, chemical machinery, food machinery, automation equipment, forging equipment, steel rolling equipment, fitness equipment, port and Marine machinery, and the other fields. We export 80% of our products to Europe, USA, Japan and Korea. We sell the goods to the famous factories in domestic as well.

SFB has a strong technical force, advanced production procedure, professional testing machine and perfect QC system. Our products have stable quality and fulfill ISO standard.

SFB in line with the concept of "honesty, quality first". Improving the quality of our products and developing new products to meet different market demands constantly.

We sincerely wish to cooperate with friends come from all of the world and seek the common development.

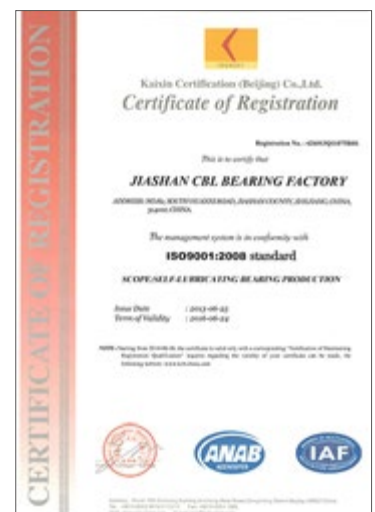

目录 Contents



SFB-10

碳钢基自润滑轴套
Carbon Steel Self-lubricating Bushes

P-01、05



SFB-1B

铜基无铅自润滑轴套
Bronze Pb-Free Self-lubricating Bushes

P-02、05



SFB-10F

碳钢基自润翻边轴套
Carbon Steel Self-lubricating Flanged Bushes

P-04



SFB-10WC

复合止推垫片
Compound Thrust Washer


P-05



SFB-2Y

碳钢基边界无铅自润滑轴套
Carbon Steel Marginal Pb-Free Self-lubricating Bushes

P-06、09



SFB-2S

碳钢基边界无铅自润滑轴套
Carbon Steel Marginal Pb-Free Self-lubricating Bushes

P-07、09



SFB-20WC

复合止推垫片
Compound Thrust Washer

P-09



SFB-090

青铜卷制轴套
Bronze-Wrapped Bushes

P-10、14



SFB-090F

青铜卷制翻边轴套
Bronze-Wrapped Flange Bushes

P-15



SFB-092

青铜卷制轴套
Bronze-Wrapped Bushes

P-10、14



SFB-092F

青铜卷制翻边轴套
Bronze-Wrapped Flange Bushes

P-15



SFB-800

双金属卷制轴套
Bimetal-Wrapped Bushes

P-16、23

目录 Contents



SFB-08G

双金属固体润滑卷制轴套
Bimetal Solid-Lubricant-
Wrapped Bushes

P-23



SFB-800F

双金属翻边轴套
Bimetal Bushes

P-22



SFB-500A

固体自润滑直套轴承
Solid-Self-Lubricating
Straight Bearings

P-25、27



SFB-500B

固体自润滑翻边轴承
Solid-Self-Lubricating
Flange Bearings

P-28



SFB-500C

固体自润滑止推垫片
Solid-Self-Lubricating
Thrust Washer

P-29



SFB-500D

固体自润滑翻边轴套
Solid-Self-Lubricating
Flange Bushings

P-30



SFB-500E

固体自润滑导向套
Solid-Self-Lubricating
Guide Post Bushings

P-31



SFB-500G

固体自润滑导向套
Solid-Self-Lubricating
Guide Post Bushings

P-33



SFB-500H

固体自润滑导向套
Solid-Self-Lubricating
Guide Ejector Bushings

P-34



SFB-500I

固体自润滑滑块
Solid-Self-Lubricating
Wear Plate

P-35



SFB-500J

固体自润滑加厚滑板
Solid-Self-Lubricating
Wear Plate

P-36



SFB-500K

固体自润滑滑板
Solid-Self-Lubricating
Wear Plate

P-37

SFB-10 无油润滑轴承 OILLESS BUSHING




产品介绍 Product introduction


是以钢板为基体，中间烧结球形青铜粉，表面轧制聚四氟乙烯和混合物卷制而成。它具有摩擦系数小、耐磨、抗腐蚀性好和无油润滑的特点。能降低成本、缩小机械体积、避免咬轴现象和降低噪音等优点。产品已广泛应用于各种机械的滑动部位，例如：印刷机、纺织机、烟草机械、汽车、摩托车与农林机械等。

It is wall wrapped bushing made of triple layer composites material which be consisted of a steel backing, a sintered porous bronze particles interlayer and calendared and mixture as surface layer, It is of low friction coefficient, anti-wear, anti-corrosion and can be used without oil, or only a trace of oil if needed. Moreover, it is of low cost, low vibration and low noise, compacted and light. It is widely applied in various sliding articles of different kind of machines, such as textile machines, tobacco machines, hydraulic vehicles, automobiles, agriculture and forests machines and soon.

使用参数 The SFB of parameters

参数 Parameters	SFB-10 无铅轴承 Lead-Free Bushing	SFB-1B 青铜基轴承 Bronze-Based Bushing	SFB-1D 液压专用轴承 Hydraulic Bushing	SFB-1S 不锈钢耐腐蚀轴承 Stainless Steel Bushing
				
最大承载压力(动) Load capacity(Dynamic)	140 N/mm ²	140 N/mm ²	140 N/mm ²	140 N/mm ²
最大承载压力(静) Load capacity(Static)	250 N/mm ²	250 N/mm ²	250 N/mm ²	250 N/mm ²
摇摆运动 Oscillating	60 N/mm ²	60 N/mm ²	60 N/mm ²	60 N/mm ²
最高滑动速度(油润滑) Speed limit(Oil)	5 m/s	5 m/s	3 m/s	4.5 m/s
摩擦系数 μ Friction Coef.	0.04~0.20	0.03~0.18	0.04~0.20	0.04~0.20
最高PV值(干) PV limit(Dry)	3.6 N/mm ² .m/s	4.3 N/mm ² .m/s	3.8 N/mm ² .m/s	3.6 N/mm ² .m/s
最高PV值(油) PV limit(Oil)	50 N/mm ² .m/s	60 N/mm ² .m/s	50 N/mm ² .m/s	50 N/mm ² .m/s
工作温度 Temp. Limit	-295°C ~ +280°C	-195°C ~ +300°C	-195°C ~ +280°C	-295°C ~ +270°C
导热系数 Thermal conductivity	13 W/m-k	18 W/m-k	16 W/m-k	16 W/m-k
线膨胀系数 Linear expansion	11×10 ⁻⁶ /K	21×10 ⁻⁶ /K	15×10 ⁻⁶ /K	15×10 ⁻⁶ /K

SFB-10 轴套规格及公差 SFB-10 Sleeve Bushing Specification & Tolerance

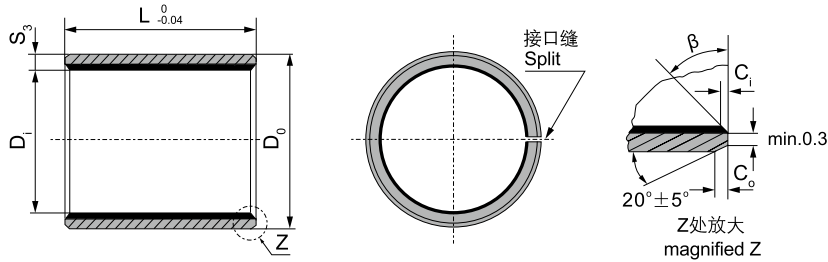

内外倒角 ID and OD chamfers

S_3	C_o	C_i	β
0.75	0.5±0.3	0.25±0.2	30°±5°
1.00	0.6±0.3	0.30±0.2	30°±5°
1.50	0.7±0.3	0.50±0.3	30°±5°

S_3	C_o	C_i	β
2.00	1.2±0.4	0.50±0.3	30°±5°
2.50	1.8±0.6	0.60±0.3	45°±5°


单位Unit: mm

轴径 (f7) Shaft D_s	座孔 (H7) Housing D_H	(OD) 外径公差 Tolerance D_o	(ID) 压装后 内孔公差 After fixed $D_{i,a}$	配合间隙 Clearance D_D	壁厚 Wall thick- ness S_3	长度 L $\begin{matrix} 0 \\ -0.40 \end{matrix}$ ($\begin{matrix} d \leq \Phi 28 & L-0.30 \\ d > \Phi 30 & L-0.40 \end{matrix}$)														
						6	8	10	12	15	20	25	30	40	50					
6	-0.010 -0.022	8	+0.015	8	+0.055 +0.025	6.055 5.990	0.077 0.000													
8	-0.013 -0.028	10	+0.015	10	+0.055 +0.025	8.055 7.990	0.083 0.003													
10	-0.013 -0.028	12	+0.018	12	+0.065 +0.030	10.058 9.990	0.086 0.003													
12	-0.016 -0.034	14	+0.018	14	+0.065 +0.030	12.058 11.990														
13	-0.016 -0.034	15	+0.018	15	+0.065 +0.030	13.058 12.990														
14	-0.016 -0.034	16	+0.018	16	+0.065 +0.030	14.058 13.990														
15	-0.016 -0.034	17	+0.018	17	+0.065 +0.030	15.058 14.990														
16	-0.016 -0.034	18	+0.018	18	+0.065 +0.030	16.058 15.990														
17	-0.016 -0.034	19	+0.021	19	+0.075 +0.035	17.061 16.990	0.095 0.006													
18	-0.016 -0.034	20	+0.021	20	+0.075 +0.035	18.061 17.990														
20	-0.020 -0.041	23	+0.021	23	+0.075 +0.035	20.071 19.990														
22	-0.020 -0.041	25	+0.021	25	+0.075 +0.035	22.071 21.990	0.112 0.010													
24	-0.020 -0.041	27	+0.021	27	+0.075 +0.035	24.071 23.990														
25	-0.020 -0.041	28	+0.021	28	+0.075 +0.035	25.071 24.990														
28	-0.020 -0.041	32	+0.025	32	+0.085 +0.045	28.085 27.990	0.126 0.010													
30	-0.020 -0.041	34	+0.025	34	+0.085 +0.045	30.085 29.990														
32	-0.025 -0.050	36	+0.025	36	+0.085 +0.045	32.085 31.990														
35	-0.025 -0.050	39	+0.025	39	+0.085 +0.045	35.085 34.990	0.135 0.015													
38	-0.025 -0.050	42	+0.025	42	+0.085 +0.045	38.085 37.990														
40	-0.025 -0.050	44	+0.025	44	+0.085 +0.045	40.085 39.990														

SFB-10 轴套规格及公差 SFB-10 Sleeve Bushing Specification & Tolerance

轴径(f7) Shaft D _s	座孔(H7) Housing D _H	(OD) 外径公差 Tolerance D _O	(ID)压装后 内孔公差 After fixed D _{i,a}	配合间隙 Clearance D _D	壁厚 Wall thick- ness S ₃	长度 L ⁰ _{-0.40}												
						20	25	30	40	50	60	70	80	100	115			
45 ^{-0.050} _{-0.025}	50 ^{+0.025}	50 ^{+0.085} _{+0.045}	45.105 44.990	0.155 0.015	2.505 2.460	4520	4525	4530	4540	4550								
50 ^{-0.050} _{-0.025}	55 ^{+0.030}	55 ^{+0.100} _{+0.055}	50.110 49.990	0.160 0.015		5020	5025	5030	5040	5050	5060							
55 ^{-0.060} _{-0.030}	60 ^{+0.030}	60 ^{+0.100} _{+0.055}	55.110 54.990	0.170 0.020				5530	5540	5550	5560							
60 ^{-0.060} _{-0.030}	65 ^{+0.030}	65 ^{+0.100} _{+0.055}	60.110 59.990			6030	6040	6050	6060	6070								
65 ^{-0.060} _{-0.030}	70 ^{+0.030}	70 ^{+0.100} _{+0.055}	65.110 64.990			6530	6540	6550	6560	6570								
70 ^{-0.060} _{-0.030}	75 ^{+0.030}	75 ^{+0.100} _{+0.055}	70.110 69.990			7030	7040	7050	7060	7070	7080							
75 ^{-0.060} _{-0.030}	80 ^{+0.030}	80 ^{+0.100} _{+0.055}	75.110 74.990			7530	7540	7550	7560	7570	7580							
80 ^{-0.045}	85 ^{+0.035}	85 ^{+0.120} _{+0.070}	80.155 80.020	0.201 0.020	2.490 2.440				8040	8050	8060	8070	8080	80100				
85 ^{-0.054}	90 ^{+0.035}	90 ^{+0.120} _{+0.070}	85.155 85.020	0.209 0.020					8540	8550	8560	8570	8580	85100				
90 ^{-0.054}	95 ^{+0.035}	95 ^{+0.120} _{+0.070}	90.155 90.020			9040	9050	9060	9070	9080	90100							
95 ^{-0.054}	100 ^{+0.035}	100 ^{+0.120} _{+0.070}	95.155 95.020			9550	9560	9570	9580	95100								
100 ^{-0.054}	105 ^{+0.035}	105 ^{+0.120} _{+0.070}	100.155 100.020			10050	10060	10070	10080	100100	100115							
105 ^{-0.054}	110 ^{+0.035}	110 ^{+0.120} _{+0.070}	105.155 105.020			10560	10570	10580	105100	105115								
110 ^{-0.054}	115 ^{+0.035}	115 ^{+0.120} _{+0.070}	110.115 110.020			11060	11070	11080	110100	110115								
120 ^{-0.054}	125 ^{+0.040}	125 ^{+0.170} _{+0.100}	120.210 120.070	0.264 0.070	2.465 2.415						12060	12070	12080	120100	120115			
125 ^{-0.063}	130 ^{+0.040}	130 ^{+0.170} _{+0.100}	125.210 125.070	0.273 0.070							12560	12570	12580	125100	125115			
130 ^{-0.063}	135 ^{+0.040}	135 ^{+0.170} _{+0.100}	130.210 130.070			13060	13070	13080	130100	130115								
140 ^{-0.063}	145 ^{+0.040}	145 ^{+0.170} _{+0.100}	140.210 140.070			14060	14070	14080	140100	140115								
150 ^{-0.063}	155 ^{+0.040}	155 ^{+0.170} _{+0.100}	150.210 150.070			15060	15070	15080	150100	150115								
160 ^{-0.063}	165 ^{+0.040}	165 ^{+0.170} _{+0.100}	160.210 160.070			16060	16070	16080	160100	160115								
180 ^{-0.063}	185 ^{+0.046}	185 ^{+0.210} _{+0.130}	180.216 180.070			0.279 0.070	2.465 2.415						18060	18070	18080	180100		
190 ^{-0.072}	195 ^{+0.046}	195 ^{+0.210} _{+0.130}	190.216 190.070	0.288 0.070							19060	19070	19080	190100				
200 ^{-0.072}	205 ^{+0.046}	205 ^{+0.210} _{+0.130}	200.016 200.070		20060	20070		20080	200100									
220 ^{-0.072}	225 ^{+0.046}	225 ^{+0.210} _{+0.130}	220.216 220.070		22060	22070		22080	220100									
250 ^{-0.072}	255 ^{+0.052}	255 ^{+0.260} _{+0.170}	250.222 250.070	0.294 0.070	2.465 2.415								25080	250100				
260 ^{-0.081}	265 ^{+0.052}	265 ^{+0.260} _{+0.170}	260.222 260.070	0.303 0.070										26080	260100			
280 ^{-0.081}	285 ^{+0.052}	285 ^{+0.260} _{+0.170}	280.222 280.070			28080	280100											
300 ^{-0.081}	305 ^{+0.052}	305 ^{+0.260} _{+0.170}	300.222 300.070			30080	300100											

SFB-10F 翻边轴套规格及公差 SFB-10F Flange Bushing Specification & Tolerance

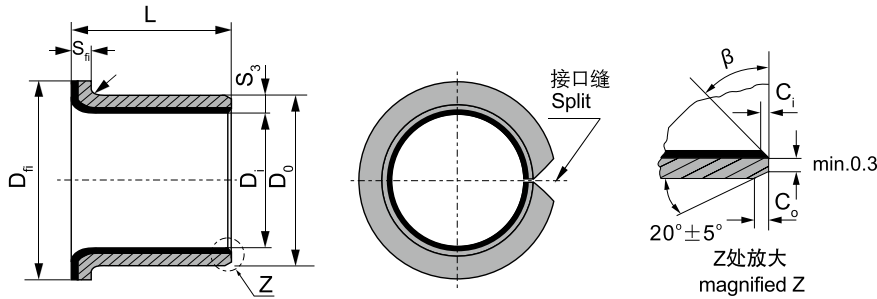


S ₃	1.0	1.5	2.0	2.5
r	1 ^{±0.05}	1±0.5	1.5±0.5	2±0.5

单位Unit: mm

轴径(f7) Shaft D _s	座孔(H7) Housing D _H	(OD) 外径公差 Tolerance D _o	(ID)压装后 内孔公差 After fixed D _{ia}	配合间隙 Clearance C _o	Designation 型号规格	Wall thickness 壁厚 S ₃	尺寸 Dimension				
							D _i	D _o	D _i ±0.5	L±0.25	S _i -0.2
6 -0.013 -0.028	8 +0.015	8 +0.055 +0.025	6.055 5.990	0.077 0.000	SFB-01FF06040	1.005 0.980	6	8	12	4	1
					SFB-01FF06070					7	
8 -0.013 -0.028	10 +0.015	10 +0.055 +0.025	8.055 7.990	0.083 0.003	SFB-01FF08055	1.005 0.980	8	10	15	5.5	1
					SFB-01FF08075					7.5	
10 -0.016 -0.034	12 +0.018	12 +0.055 +0.025	10.058 9.990	0.086 0.003	SFB-01FF10070	1.005 0.980	10	12	18	7	1
					SFB-01FF10090					9	
					SFB-01FF10120					12	
12 -0.016 -0.034	14 +0.018	14 +0.065 +0.030	12.058 11.990	0.092 0.006	SFB-01FF12070	1.005 0.980	12	14	20	7	1
					SFB-01FF12090					9	
					SFB-01FF12120					12	
14 -0.016 -0.034	16 +0.018	16 +0.065 +0.030	14.058 13.990	0.092 0.006	SFB-01FF14120	1.005 0.980	14	16	22	12	1
					SFB-01FF14170					17	
					SFB-01FF15090					9	
15 -0.016 -0.034	17 +0.018	17 +0.065 +0.030	15.058 14.990	0.092 0.006	SFB-01FF15120	1.005 0.980	15	17	23	12	1
					SFB-01FF15170					17	
					SFB-01FF16120					12	
16 -0.016 -0.034	18 +0.018	18 +0.065 +0.030	16.058 15.990	0.092 0.006	SFB-01FF16170	1.005 0.980	16	18	24	17	1
					SFB-01FF18120					12	
					SFB-01FF18170					17	
18 -0.016 -0.034	20 +0.021	20 +0.075 +0.035	18.061 17.990	0.095 0.006	SFB-01FF18200	1.005 0.980	18	20	26	20	1
					SFB-01FF20115					11.5	
					SFB-01FF20165					16.5	
20 -0.020 -0.041	23 +0.021	23 +0.075 +0.035	20.071 19.990	0.112 0.010	SFB-01FF20215	1.505 1.475	20	23	30	21.5	1.5
					SFB-01FF22150					15	
					SFB-01FF22200					20	
22 -0.020 -0.041	25 +0.021	25 +0.075 +0.035	22.071 21.990	0.112 0.010	SFB-01FF25115	1.505 1.475	22	25	32	15	1.5
					SFB-01FF25165					16.5	
					SFB-01FF25215					21.5	
25 -0.020 -0.041	28 +0.021	28 +0.075 +0.035	25.071 24.990	0.112 0.010	SFB-01FF30160	2.005 1.970	25	28	35	11.5	2
					SFB-01FF30260					16.5	
					SFB-01FF35160					16	
30 -0.025 -0.050	34 +0.025	34 +0.075 +0.035	30.085 29.990	0.126 0.010	SFB-01FF35260	2.005 1.970	30	34	42	26	2
					SFB-01FF40260					26	
					SFB-01FF40400					40	
35 -0.025 -0.050	39 +0.025	39 +0.085 +0.045	35.085 34.990	0.135 0.015	SFB-01FF35160	2.005 1.970	35	39	47	16	2
					SFB-01FF35260					26	
					SFB-01FF40260					26	
40 -0.025 -0.050	44 +0.025	44 +0.085 +0.045	40.085 39.990	0.135 0.015	SFB-01FF40260	2.005 1.970	40	44	53	26	2
					SFB-01FF40400					40	


SFB-10WC 垫片规格及公差 SFB-10WC Thrust Washer Specification & Tolerance

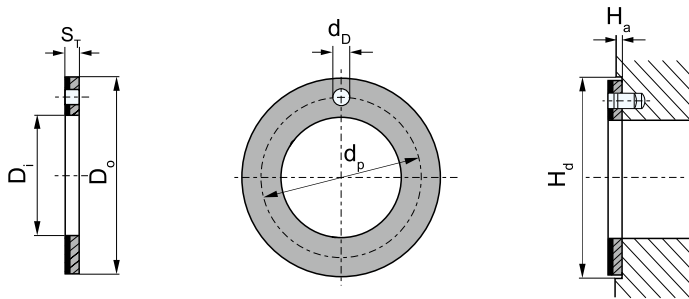

单位Unit: mm

轴径 Shaft D_s	型号规格 Standard No.	垫片尺寸 Washer size				安装尺寸 Assemble size		$H_a+0.12$
		$D_i+0.25$	$D_o-0.25$	$S_r-0.05$	$d_p\pm 0.125$	$d_b^{+0.4}_{+0.1}$	$H_a\pm 0.2$	
8	W10	10	20	1.5	15	1.5	1	20
10	W12	12	24		18			24
12	W14	14	26		20	26		
14	W16	16	30		23	30		
16	W18	18	32		25	32		
18	W20	20	36		28	36		
20	W22	22	38		30	38		
22	W24	24	42		33	42		
24	W26	26	44		35	44		
26	W28	28	48		38	48		
30	W32	32	54		43	54		
36	W38	38	62		50	62		
40	W42	42	66		54	66		
46	W48	48	74		2	61		1.5
50	W52	52	78	65		78		
60	W62	62	90	76		90		

SFB-10SP 板材规格及公差 SFB-10SP Strip Specification & Tolerance

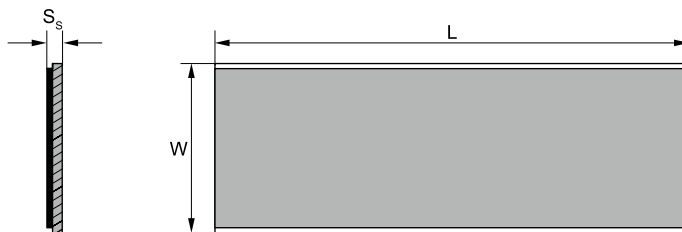


单位Unit: mm

型号规格 Standard No.	长度 $L\pm 1$	宽度 $W\pm 1$	厚壁 Wall thickness $S_s-0.05$
SP	500	150	1.0
SP	500	150	1.5
SP	500	150	2.0
SP	500	150	2.5

SFB-20 边界润滑轴套

BOUNDARY LUBRICATING BUSHING

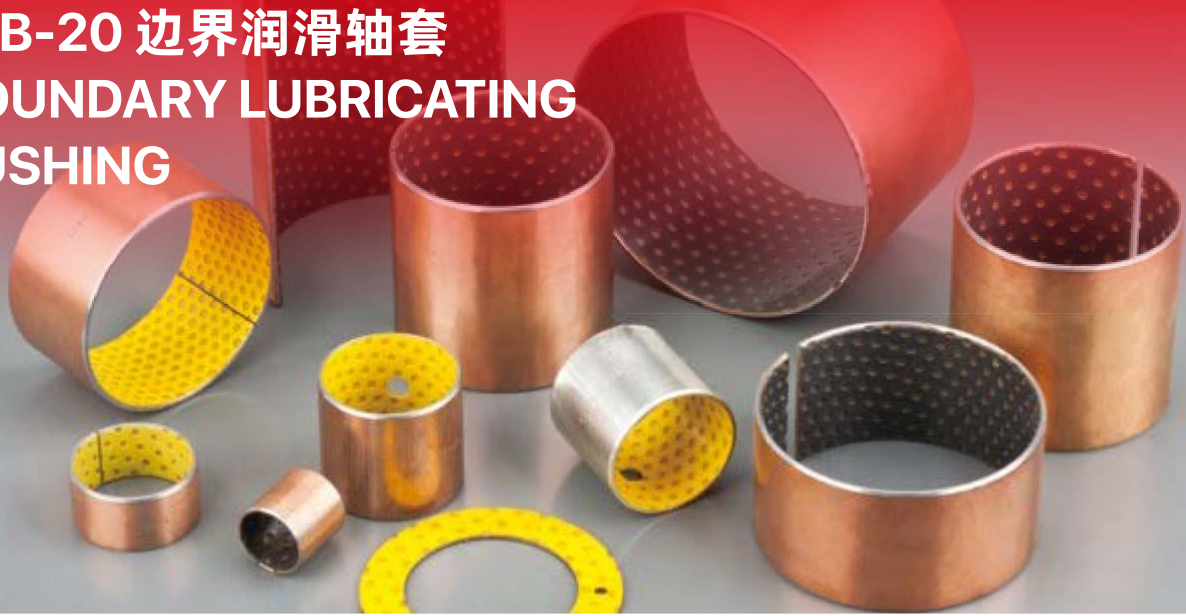

产品介绍

Product introduction

SFB-20边界润滑轴承，是以钢板为基体，中间烧结球型青铜粉，表面轧制改性聚甲醛（POM），并含有储油坑。它适用于常温条件下，低速中载的场所，取代传统铜套，既降低成本又延长使用寿命。特殊情况下，在轧钢机上使用，又能节省加油频次、简化更换程序。该产品已广泛应用于汽车底盘、锻压机床、冶金矿山机械、工程机械、水电、轧钢行业等领域。


SFB-20 boundary lubrication bushing is based on a composite material with 3 firmly bonded layers: steel as backing, sintered bronze spherical powder as interlayer and modified POM as lining layer, It fits well for low speed, middle-load and normal temperature and saves cost and prolongs working life when replacing normal all copper sleeves. It is widely applied in auto chassis, forging machine, metallurgical and mining machine, civil engineering, power station, strip rolling industries, etc.

使用参数

The use of parameters

	SFB-20 边界润滑轴承 Marginal Bearing	SFB-2Y 无铅边界润滑轴承 Lead Free Marginal Bearing	SFB-2S 无铅边界润滑轴承 Lead Free Marginal Bearing	SFB-2L 无铅边界润滑轴承 Lead Free Marginal Bearing
参数 Parameters				
最大承载压力P(静) Max load capacity P(Static)	250 N/mm ²	250 N/mm ²	250 N/mm ²	250 N/mm ²
最大承载压力P(动) Max load capacity P(Dynamic)	140 N/mm ²	140 N/mm ²	140 N/mm ²	140 N/mm ²
最大线速度 V(脂) Max line speed V(Grease)	2.5m/s	2.5m/s	2.5m/s	2.5m/s
最高 PV 值(脂) Max imum PV value(Grease)	3 N/mm ² .m/s	3 N/mm ² .m/s	3 N/mm ² .m/s	3 N/mm ² .m/s
摩擦系数 μ(脂) Friction coef μ(Grease)	0.05~0.25	0.05~0.25	0.05~0.25	0.05~0.25
工作温度 Working temperature	-40°C~+110°C	-40°C~+110°C	-40°C~+110°C	-40°C~+110°C
导热系数 Thermal conductivity	4 W/(m.k)	4 W/(m.k)	4 W/(m.k)	4 W/(m.k)
线膨胀系数 Coefficient of linear expansion	11×10 ⁻⁶ /k	11×10 ⁻⁶ /k	11×10 ⁻⁶ /k	11×10 ⁻⁶ /k

SFB-20 轴承规格及公差 SFB-20 Sleeve Bushing Specification & Tolerance

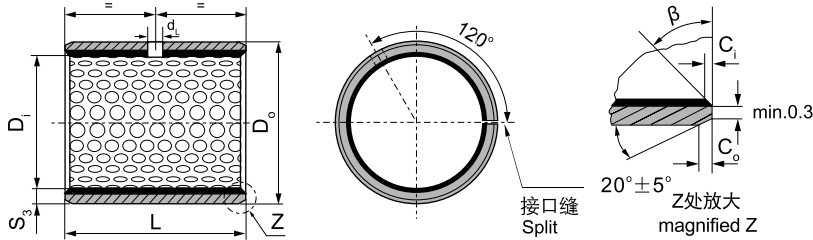

内外倒角 ID and OD chamfers

S ₃	C _o	C _i	β
1.0	0.6±0.3	0.30±0.2	30°±5°
1.5	0.7±0.3	0.50±0.2	30°±5°

S ₃	C _o	C _i	β
2.00	1.2±0.4	0.50±0.3	30°±5°
2.50	1.8±0.6	0.80±0.3	45°±5°


单位Unit: mm

轴径 Shaft D _s h8	座孔 Housing H7 D _H	(OD) 外径公差 Tolerance D _o	(ID)压装后 内孔公差 After fixed D _{i,a}	配合间隙 Clearance D _b	壁厚 Wall thick- ness S ₃	油孔 Oil hole d _L	长度 L ⁰ _{-0.40}														
							10	15	20	25	30	35	40	45	50	60					
10 _{-0.022}	12 ^{+0.018}	12 ^{+0.065} _{+0.030}	10.108 10.040	0.130 0.040	0.980 0.955	4	1010	1015	1020												
12 _{-0.027}	14 ^{+0.018}	14 ^{+0.065} _{+0.030}	12.108 12.040	0.135 0.040			1210	1215	1220												
14 _{-0.027}	16 ^{+0.018}	16 ^{+0.065} _{+0.030}	14.108 14.040				1415	1420													
15 _{-0.027}	17 ^{+0.018}	17 ^{+0.065} _{+0.030}	15.108 15.040				1515	1520	1525												
16 _{-0.027}	18 ^{+0.018}	18 ^{+0.065} _{+0.030}	16.108 16.040				1615	1620	1625												
18 _{-0.027}	20 ^{+0.021}	20 ^{+0.075} _{+0.035}	18.111 18.040				0.138 0.040	1815	1820	1825											
20 _{-0.033}	23 ^{+0.021}	23 ^{+0.075} _{+0.035}	20.131 20.050	0.164 0.050	1.475 1.445	4	2015	2020	2025	2030											
22 _{-0.033}	25 ^{+0.021}	25 ^{+0.075} _{+0.035}	22.131 22.050				2215	2220	2225	2230											
25 _{-0.033}	28 ^{+0.021}	28 ^{+0.075} _{+0.035}	25.131 25.050				2515	2520	2525	2530											
28 _{-0.033}	32 ^{+0.025}	32 ^{+0.085} _{+0.045}	28.155 28.060	0.188 0.060	1.970 1.935	6		2820	2825	2830											
30 _{-0.033}	34 ^{+0.025}	34 ^{+0.085} _{+0.045}	30.155 30.060				3020	3025	3030	3035	3040										
35 _{-0.039}	39 ^{+0.025}	39 ^{+0.085} _{+0.045}	35.155 35.060	0.194 0.060	1.970 1.935	6		3520	3525	3530	3535	3540									
40 _{-0.039}	44 ^{+0.025}	44 ^{+0.085} _{+0.045}	40.155 40.060				4020	4025	4030	4035	4040	4045	4050								
45 _{-0.039}	50 ^{+0.025}	50 ^{+0.085} _{+0.045}	45.195 45.080	0.234 0.080	2.460 2.415	8		4520	4525	4530	4535	4540	4545	4550							
50 _{-0.039}	55 ^{+0.030}	55 ^{+0.100} _{+0.055}	50.200 50.080				5030	5035	5040	5045	5050	5060									
55 _{-0.046}	60 ^{+0.030}	60 ^{+0.100} _{+0.055}	55.200 55.080	0.246 0.080	2.460 2.415	8				5530	5535	5540	5545	5550	5560						
60 _{-0.046}	65 ^{+0.030}	65 ^{+0.100} _{+0.055}	60.200 60.080				6030	6035	6040	6045	6050	6060									

SFB-20 轴承规格及公差 SFB-20 Sleeve Bushing Specification & Tolerance

轴径 Shaft D _s h8	座孔 Housing H7 D _H	(OD) 外径公差 Tolerance D _O	(ID)压装后 内孔公差 After fixed D _{i,a}	配合间隙 Clearance D _D	壁厚 Wall thick- ness S ₃	油孔 Oil hole d _L	长度 L ⁰ _{-0.40}												
							40	50	60	80	90	95	100	110	120				
65 _{-0.046}	70 ^{+0.030}	70 ^{+0.100} _{+0.055}	65.200 65.080	0.246 0.080	2.460 2.415	8	6540	6550	6560										
70 _{-0.046}	75 ^{+0.030}	75 ^{+0.100} _{+0.055}	70.200 70.080				7040	7050	7060	7080									
75 _{-0.046}	80 ^{+0.030}	80 ^{+0.100} _{+0.055}	75.200 75.080				7540	7550	7560	7580									
80 _{-0.046}	85 ^{+0.035}	85 ^{+0.120} _{+0.070}	80.265 80.100	0.313 0.100	2.450 2.385	9.5	8040	8050	8060	8080									
85 _{-0.054}	90 ^{+0.035}	90 ^{+0.120} _{+0.070}	85.265 85.100	0.321 0.100			8540	8550	8560	8580									
90 _{-0.054}	95 ^{+0.035}	95 ^{+0.120} _{+0.070}	90.265 90.100				9040	9050	9060	9080	9090								
100 _{-0.054}	105 ^{+0.035}	105 ^{+0.120} _{+0.070}	100.265 100.100				10050	10060	10080	10090	10095								
105 _{-0.054}	110 ^{+0.035}	110 ^{+0.120} _{+0.070}	105.265 105.100				10550	10560	10580	10590	10595	105100	105110						
110 _{-0.054}	115 ^{+0.035}	115 ^{+0.120} _{+0.070}	110.265 110.110				11050	11060	11080	11090	11095	110100	110110						
120 _{-0.054}	125 ^{+0.040}	125 ^{+0.170} _{+0.100}	120.270 120.110				0.324 0.100	12050	12060	12080	12090	12095	120100	120110					
125 _{-0.063}	130 ^{+0.040}	130 ^{+0.170} _{+0.100}	125.270 125.110					12550	12560	12580	12590	12595	125100	125110					
130 _{-0.063}	135 ^{+0.040}	135 ^{+0.170} _{+0.100}	130.270 130.110	13050				13060	13080	13090	13095	130100	130110						
140 _{-0.063}	145 ^{+0.040}	145 ^{+0.170} _{+0.100}	140.270 140.110	14050				14060	14080	14090	14095	140100	140110						
150 _{-0.063}	155 ^{+0.040}	155 ^{+0.170} _{+0.100}	150.270 150.110	15050				15060	15080	15090	15095	150100	150110						
160 _{-0.063}	165 ^{+0.040}	165 ^{+0.170} _{+0.100}	160.270 160.110	16050				16060	16080	16090	16095	160100	160110						
170 _{-0.063}	175 ^{+0.040}	175 ^{+0.170} _{+0.100}	170.270 170.110	17050				17060	17080	17090	17095	170100	170110						
180 _{-0.063}	185 ^{+0.046}	185 ^{+0.210} _{+0.130}	180.276 180.110	0.339 0.110			9.5	18050	18060	18080	18090	18095	180100	180110					
190 _{-0.072}	195 ^{+0.046}	195 ^{+0.210} _{+0.130}	190.276 190.110		19050	19060		19080	19090	19095	190100	190110	190120						
200 _{-0.072}	205 ^{+0.046}	205 ^{+0.210} _{+0.130}	200.276 200.110		20050	20060		20080	20090	20095	200100	200110	200120						
220 _{-0.072}	225 ^{+0.046}	225 ^{+0.210} _{+0.130}	220.276 220.110		22050	22060		22080	22090	22095	220100	220110	220120						
240 _{-0.072}	245 ^{+0.046}	245 ^{+0.210} _{+0.130}	240.276 240.110		24050	24060		24080	24090	24095	240100	240110	240120						
250 _{-0.072}	255 ^{+0.052}	255 ^{+0.260} _{+0.170}	250.282 250.110		0.354 0.110	9.5		25050	25060	25080	25090	25095	250100	250110	250120				
260 _{-0.081}	265 ^{+0.052}	265 ^{+0.260} _{+0.170}	260.282 260.110					26050	26060	26080	26090	26095	260100	260110	260120				
280 _{-0.081}	285 ^{+0.052}	285 ^{+0.260} _{+0.170}	280.282 280.110	28050			28060	28080	28090	28095	280100	280110	280120						
300 _{-0.081}	305 ^{+0.052}	305 ^{+0.260} _{+0.170}	300.282 300.110	30050			30060	30080	30090	30095	300100	300110	300120						



SFB-20WC 垫片规格及公差 SFB-20WC Thrust Washer Specification & Tolerance

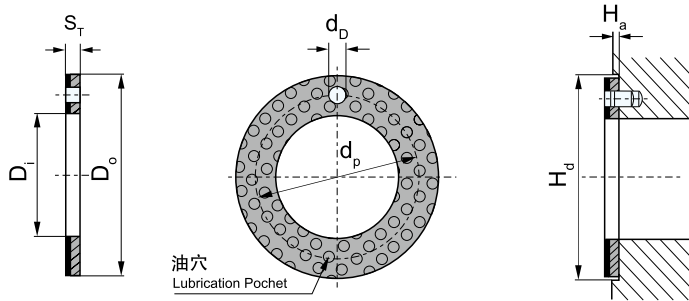

单位Unit: mm

轴径 Shaft D_s	型号规格 Standard No.	垫片尺寸 Washer size				安装尺寸 Assemble size		
		$D_i+0.25$	$D_o-0.25$	$S_T-0.05$	$d_p\pm 0.125$	$d_D^{+0.4}_{+0.1}$	$H_a\pm 0.2$	$H_d+0.12$
8	W10	10	20	1.5	15	1.5	1	20
10	W12	12	24		18			24
12	W14	14	26		20			26
14	W16	16	30		23			30
16	W18	18	32		25	32		
18	W20	20	36		28	36		
20	W22	22	38		30	3		38
22	W24	24	42		33			42
24	W26	26	44		35	44		
26	W28	28	48		38	48		
30	W32	32	54		43	4		54
36	W38	38	62		50			62
40	W42	42	66		54			66
46	W48	48	74		61			74
50	W52	52	78	65	1.5		78	
60	W62	62	90	76			90	

SFB-20SP 板材标准公制尺寸 SFB-20SP Strip Standard Metric Size

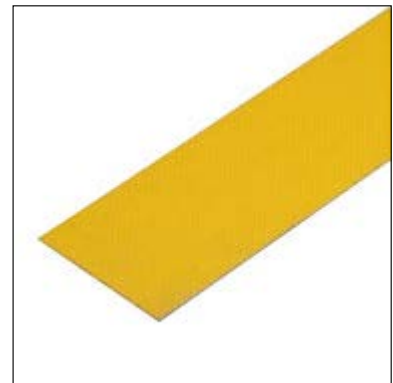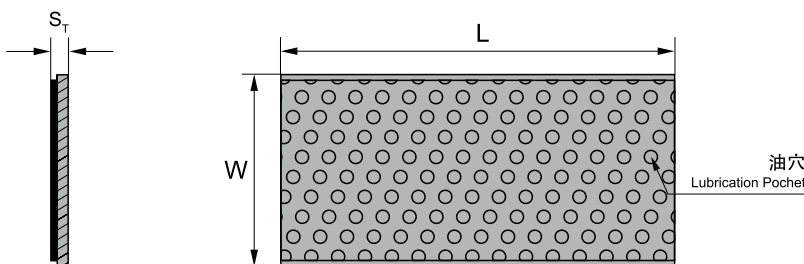

单位Unit: mm

型号规格 Standard No.	长度 $L \pm 1$	宽度 $W \pm 1$	厚壁 Wall thickness $S_s -0.05$
P	500	150	1.0
P	500	150	1.5
P	500	150	2.0
P	500	150	2.5

SFB 青铜卷制轴套

BRONZE WRAPPED BUSHING



产品介绍






Product introduction

该产品以优质低碳钢板为基体，表面轧制菱形或油穴，油穴内埋入特殊的固体润滑剂，它有良好的润滑性和抗磨损性，能在无油或少油条件下工作，特别适用于高温，水溶液浸润或其他无油加油或加油困难场合。

It is made of high quality low-carbon steel, and the surface is rolled to diamond or round oil pockets. The special lubricant is embedded in the pockets. It has good lubricating and corrosion resistance property, it can work in the condition of little of oil or none of oil. It is particularly applied to high temperature, water solution and the occasions where cannot be added oil.

使用参数

The use of parameters

	SFB-090 青铜卷制轴套 Bronze Wrapped Bushing	SFB-091 黄铜卷制轴套 Copper Wrapped Bushing	SFB-092 青铜布孔轴套 Bronze Wrapped Bushing	SFB-094 青铜布孔轴套带密封圈 Bronze Wrapped Bushing with SFB-als	SFB-09G 青铜嵌石墨卷制轴套 Bronze +Graphite Wrapped Bushing
参数 Parameters					
密度 Density	8.9g/cm ³	8.4g/cm ³	8.9g/cm ³	8.9g/cm ³	8.3g/cm ³
抗压强度 Pressure resistance strength	470N/mm ²	440N/mm ²	470N/mm ²	470N/mm ²	470N/mm ²
导热系数 Coefficient of heat conduction	60W/m.k	71W/m.k	60W/m.k	60W/m.k	58W/m.k
线膨胀系数 Linear expansion coefficient	18.5×10 ⁻⁶ /K	19.2×10 ⁻⁶ /K	18.5×10 ⁻⁶ /K	18.5×10 ⁻⁶ /K	18.5×10 ⁻⁶ /K
硬度 Hardness	90~120 HB	80~110 HB	90~120 HB	90~120 HB	90~120 HB
延伸率 Elongation	55%	30%	55%	55%	55%
材料名称 Alloy material	CuSn8P	CuZn31Si	CuSn8P	CuSn8P	CuSn8P
其它可选材料 Other material	CuSn6.5P		CuSn6.5P	CuSn6.5P	CuSn6.5P

应用举例

Application case

产品主要应用于起重机械、建筑机械、汽车、拖拉机行业、机床工业及采矿机械。


Products are mainly used in lifting machinery, construction machinery, automobile, tractor industry, machine tool industry and mining machinery.

SFB-090 系列青铜卷制轴套 SFB-090 Bronze-Wrapped Bushes

材料结构 Material Structure

采用高密度青铜卷制成形或球形油袋、油穴特殊合成内部表面以减少磨损延长使用时间并且很好的做到防腐功能。

High-density bronze is rolled into shape or oil bags and oil holes specially integrated into the inner surface to reduce the wearing and prolong the service hours. Besides, it has excellent anti-corrosion functions.

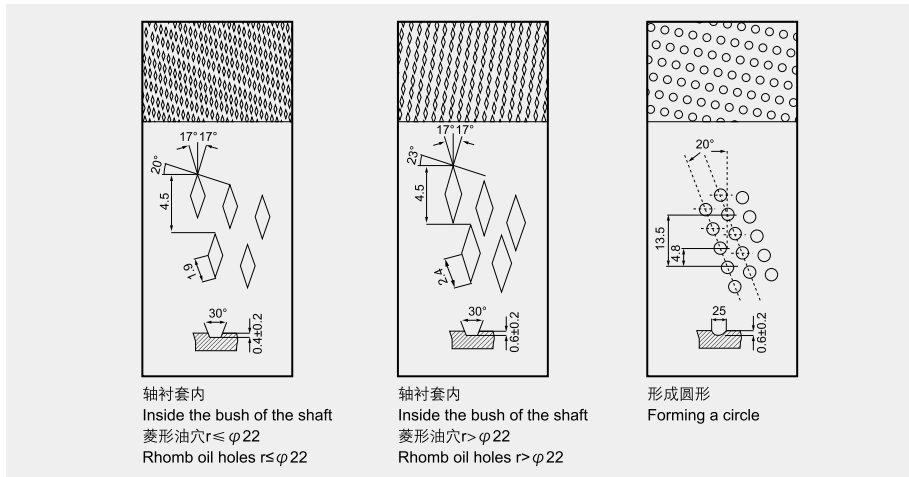

应用范围 Application scope

此系列轴承广泛应用于农用、建设机械以及工程机械等。

This serie of bearing is widely applied to agricultural, construction and engineering machineries, etc.

油穴类别(依据 DIW1494/ISO3457)。

Categories of oil holes (As per to DIW1494/ISO3457)。

化学成分 Chemical Composition

材料 Material: CuSn8P	铜 Cu	锡 Sn	磷 P
---------------------	------	------	-----

物理特性 Physical Property

型号 Type	密度 Density	散热热胀 Heat Emission and Expansion	热传导 Heat Conducting	硬度 Hardness	抗压强度 Compression strength	延伸率 Extensile
SFB-090	8.8g/cm ³	18.5×10 ⁻⁶ ×K ⁻¹	58W(m·k)	90~150HB	470N/mm ²	40%

标准衬套公差 (依据 DIW W91/1503547)

Standard tolerance for bushes (As per to DIW W91/1503547)

标准直径 Standard Dia.	衬套外径尺寸 O.D.Size	相配座孔 Housing Bore	衬套内径尺寸 I.D.Size	相配轴径 Axle
10~18	+0.065 +0.030	+0.018 0	+0.046 0	-0.016 -0.043
18~30	+0.075 +0.035	+0.021 0	+0.052 0	-0.020 -0.020
30~50	+0.085 +0.045	+0.025 0	+0.062 0	-0.025 -0.064
50~80	+0.100 +0.055	+0.030 0	+0.074 0	-0.030 -0.076
80~120	+0.120 +0.070	+0.035 0	+0.087 0	-0.036 -0.090
120~180	+0.170 +0.100	+0.400 0	+0.100 0	-0.043 -0.106
180~250	+0.210 +0.130	+0.046 0	+0.115 0	-0.050 -0.122
250~315	+0.260 +0.170	+0.052 0	+0.130 0	-0.056 -0.137

SFB-092 系列青铜卷制轴套 SFB-092 Bronze-Wrapped Bushes

材料结构 Material Structure


采用高密度青铜卷制成形或球形油袋、油穴特殊合成内部表面以减少磨损延长使用时间并且很好的做到防腐功能。

High-density bronze is rolled into shape or oil bags and oil holes, specially integrated into the inner surface to reduce the wearing and prolong the service hours. Besides, it has excellent anti-corrosion functions.

应用范围 Application scope

此系列轴承广泛应用于农用、建设机械以及工程机械等。

This series of bearing is widely applied to agricultural, construction and engineering machineries, etc.

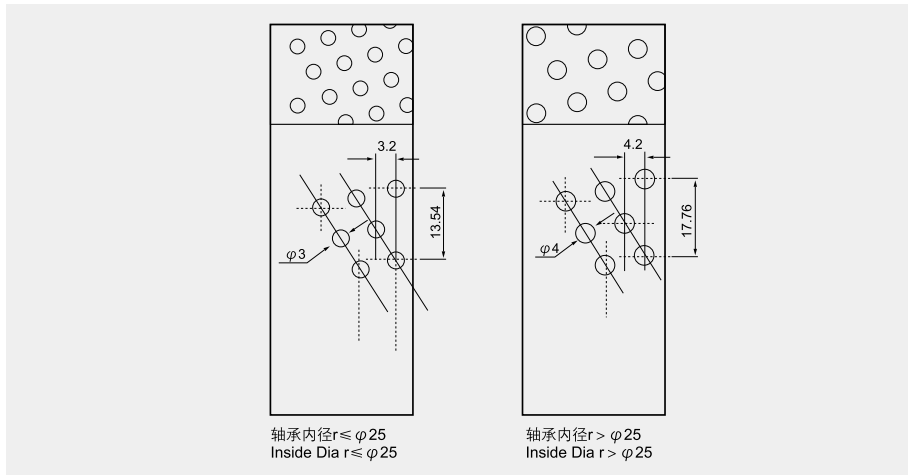

化学成分 Chemical Composition

材料 Material: CuSn8P	铜 Cu	锡 Sn	磷 P
---------------------	------	------	-----


物理特性 Physical Property

型号 Type	密度 Density	散热热胀 Heat Emission and Expansion	热传导 Heat Conducting	硬度 Hardness	抗压强度 Compression strength	延伸率 Extensile
SFB-092	8.8g/cm ³	18.5×10 ⁻⁶ ×K ⁻¹	58W(m-k)	90~150HB	470N/mm ²	40%

标准衬套公差 (依据 DIW W91/1503547) Standard tolerance for bushes (As per to DIW W91/1503547)

标准直径 Standard Dia.	衬套外径尺寸 O.D.Size	相配座孔 Housing Bore	衬套内径尺寸 I.D.Size	相配轴径 Axle
10~18	+0.065 +0.030	+0.018 0	+0.046 0	-0.016 -0.043
18~30	+0.075 +0.035	+0.021 0	+0.052 0	-0.020 -0.020
30~50	+0.085 +0.045	+0.025 0	+0.062 0	-0.025 -0.064
50~80	+0.100 +0.055	+0.030 0	+0.074 0	-0.030 -0.076
80~120	+0.120 +0.070	+0.035 0	+0.087 0	-0.036 -0.090
120~180	+0.170 +0.100	+0.400 0	+0.100 0	-0.043 -0.106
180~250	+0.210 +0.130	+0.046 0	+0.115 0	-0.050 -0.122
250~315	+0.260 +0.170	+0.052 0	+0.130 0	-0.056 -0.137

SFB-090 青铜轴套规格及公差 SFB-090 Bronze Sleeve Bushing Specification & Tolerance

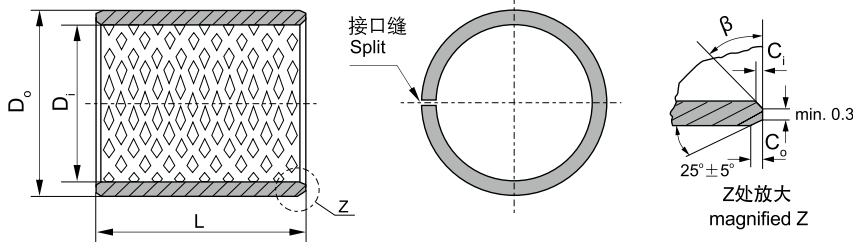

内外倒角 ID and OD chamfers

S_3	C_o	C_i	β
0.75	0.5 ± 0.3	0.25 ± 0.2	$35^\circ \pm 5^\circ$
1.00	0.6 ± 0.3	0.30 ± 0.2	$35^\circ \pm 5^\circ$
1.50	0.7 ± 0.3	0.50 ± 0.3	$35^\circ \pm 5^\circ$

S_3	C_o	C_i	β
2.00	1.2 ± 0.4	0.50 ± 0.3	$35^\circ \pm 5^\circ$
2.50	1.8 ± 0.6	0.60 ± 0.3	$45^\circ \pm 5^\circ$


单位Unit: mm

内径 D_i ϕd	外径 D_o ϕD	长度 $L \begin{smallmatrix} 0 \\ -0.40 \end{smallmatrix}$													
		10	15	20	25	30	35	40	50	60	70	80	90	100	
10	12	1010	1015	1020											
12	14	1210	1215	1220											
14	16	1410	1415	1420	1425										
15	17	1510	1515	1520	1525										
16	18	1610	1615	1620	1625										
18	20	1810	1815	1820	1825										
20	23	2010	2015	2020	2025										
22	25	2210	2215	2220	2225	2230									
24	27		2415	2420	2425	2430									
25	28		2515	2520	2525	2530									
28	31		2815	2820	2825	2830									
30	34		3015	3020	3025	3030	3035	3040							
32	36		3215	3220	3225	3230	3235	3240							
35	39		3515	3520	3525	3530	3535	3540							
40	44			4020	4025	4030	4035	4040	4050						
45	50			4520	4525	4530	4535	4540	4550						
50	55			5020	5025	5030	5035	5040	5050	5060					
55	60			5520	5525	5530	5535	5540	5550	5560					
60	65				6025	6030	6035	6040	6050	6060	6070				
65	70					6530	6535	6540	6550	6560	6570				
70	75					7030	7035	7040	7050	7060	7070	7080			
75	80					7530	7535	7540	7550	7560	7570	7580			
80	85					8030	8035	8040	8050	8060	8070	8080			
85	90					8530	8535	8540	8550	8560	8570	8580	8590		
90	95					9030	9035	9040	9050	9060	9070	9080	9090		
95	100							9540	9550	9560	9570	9580	9590	95100	

SFB-090 青铜轴套规格及公差 SFB-090 Bronze Sleeve Bushing Specification & Tolerance

内径 D _i φd	外径 D _o φD	长度 L $\begin{smallmatrix} 0 \\ -0.40 \end{smallmatrix}$									
		25	30	35	40	50	60	70	80	90	100
100	105					10050	10060	10070	10080	10090	100100
105	110					10550	10560	10570	10580	10590	105100
110	115					11050	11060	11070	11080	11090	110100
115	120					11550	11560	11570	11580	11590	115100
120	125						12060	12070	12080	12090	120100
125	130						12560	12570	12580	12590	125100
130	135						13060	13070	13080	13090	130100
135	140						13560	13570	13580	13590	135100
140	145						14060	14070	14080	14090	140100
145	150						14560	14570	14580	14590	145100
150	155						15060	15070	15080	15090	150100
155	160						15560	15570	15580	15590	155100
160	165						16060	16070	16080	16090	160100
165	170						16560	16570	16580	16590	165100
170	175						17060	17070	17080	17090	170100
175	180						17560	17570	17580	17590	175100
180	185						18060	18070	18080	18090	180100
185	190						18560	18570	18580	18590	185100
190	195						19060	19070	19080	19090	190100
195	200						19560	19570	19580	19590	195100
200	205						20060	20070	20080	20090	200100
205	210						20560	20570	20580	20590	205100
215	220						21560	21570	21580	21590	215100
225	230						22560	22570	22580	22590	225100
230	235						23060	23070	23080	23090	230100
240	245						24060	24070	24080	24090	240100
250	255						25060	25070	25080	25090	250100
260	265						26060	26070	26080	26090	260100
270	275						27060	27070	27080	27090	270100
280	285						28060	28070	28080	28090	280100
290	295						29060	29070	29080	29090	290100
300	305						30060	30070	30080	30090	300100

SFB-090F 青铜翻边轴套规格及公差 SFB-090F Bronze Flange Bushing Specification & Tolerance

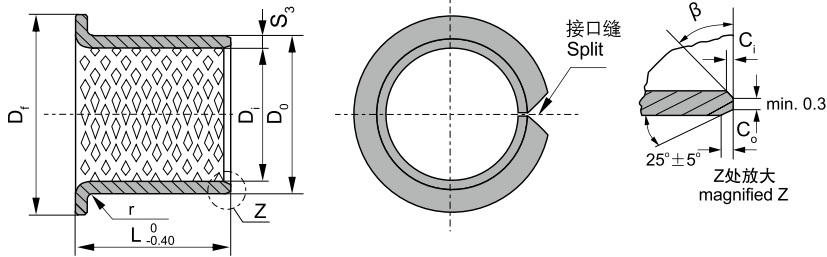

S_3	1.0	1.5	2.0	2.5
r	$1^{-0.5}$	1 ± 0.5	1.5 ± 0.5	2 ± 0.5

单位Unit: mm

内径 D_i ϕd	外径 D_o ϕD	法兰外径 D_{11}	长度 L 0 -0.40											
			15	20	25	30	35	40	50	60	70	80	90	
25	28	35	25150	25200	25250									
30	34	45		30200	30250	30300								
35	39	50		35200	35250	35300	35350							
40	44	55			40250	40300	40350	40400						
45	50	60				45300	45350	45400	45500					
50	55	65				50300	50350	50400	50500					
55	60	70				55300	55350	55400	55500					
60	65	75				60300	60350	60400	60500	60600				
65	70	80				65300	65350	65400	65500	65600				
70	75	85					70350	70400	70500	70600	70700			
75	80	90					75350	75400	75500	75600	75700			
80	85	100					80350	80400	80500	80600	80700	80800		
90	95	110							90500	90600	90700	90800	90900	
100	105	120							100500	100600	100700	100800	100900	
110	115	130							110500	110600	110700	110800	110900	
120	125	140							120500	120600	120700	120800	120900	
130	135	155								130600	130700	130800	130900	
140	145	165								140600	140700	140800	140900	
150	155	180								150600	150700	150800	150900	
160	165	190								160600	160700	160800	160900	
170	175	200								170600	170700	170800	170900	
180	185	215								180600	180700	180800	180900	
190	195	225								190600	190700	190800	190900	
200	205	235								200600	200700	200800	200900	
225	230	260								225600	225700	225800	225900	
250	255	290								250600	250700	250800	250900	
265	270	305								265600	265700	265800	265900	
285	290	325								285600	285700	285800	285900	
300	305	340								300600	300700	300800	300900	

SFB-800 双金属轴套

BIMETAL BUSHING



产品介绍

Product introduction

SFB双金属轴承,是以低碳钢板为基体,表面烧结青铜合金。合金表面轧制油穴或油醋槽,便于储存油脂,有效降低磨损。钢背根据需要镀防腐层。适用于中载、中到高速,以及大冲击载荷的轴承,如内燃机主轴瓦、连杆衬套、摇臂衬套;油泵侧摩擦片等。

It is backed with high quality low carbon steel with tin-lead-bronze alloy sintered on its surface. To effectively decrease abrasion, its alloy surface can be machined with ball shaped oil sockets for easier oil storage. When necessary, an anti-erosive coating can be plated on the steel back. It can be applied to conditions of mediate load with mediate or high running velocity and conditions with enormous impact load. In mechanical applications, It is used to make wrapped bushes, thrust washer and bushes on connecting rod level of gas engine.

使用参数

The use of parameters

	SFB-800 双金属轴套 Bimetal Bushing	SFB-801 双金属轴套 Bimetal Bushing	SFB-802 双金属轴套 Bimetal Bushing	SFB-803 双金属轴套 Bimetal Bushing	SFB-08G 双金属轴套 Bimetal Bushing
参数 Parameters					
材料型号 Material type	CuPb10Sn10/ CuSn6Zn6Pb3	CuPb24Sn4	CuPb30	AlSn20Cu	CuPb10Sn10+Graphite
合金层硬度 Hardness of bronze alloy	70~100HB	45~70HB	30~45HB	30~40HB	60~90HB
最大荷载 Max. dynamic Load	65N/mm ²	38N/mm ²	25N/mm ²	30N/mm ²	90N/mm ²
“蓝宝石”疲劳级 Mpa Sapphire" fatigue class	125	115	105	105	-
摩擦系数(油) Friction coefficient(oil)	0.06~0.14	0.06~0.16	0.08~0.16	0.08~0.17	<0.08
允许PV值(脂) PV limit(GreaSFB-)	2.8N/mm ² .M/s	2.8N/mm ² .M/s	2.5N/mm ² .M/s	-	2.8N/mm ² .M/s
允许PV值(油) PV limit(Oil)	10N/mm ² .M/s	10N/mm ² .M/s	8N/mm ² .M/s	6N/mm ² .M/s	10N/mm ² .M/s
最高使用温度 Max. temperature	260°C	200°C	170°C	150°C	200°C
最高静承载压力 Load limit	150N/mm ²	130N/mm ²	120N/mm ²	100N/mm ²	90N/mm ²
最高速度(油) Speed limit v max.	5m/s	10m/s	15m/s	25m/s	5m/s
对磨轴硬度 Hardness of mating surface	53 HRC	50 HRC	270 HB	250 HB	53 HRC
拉伸强度 Tensile strength	150N/mm ²	150N/mm ²	200N/mm ²	200N/mm ²	185N/mm ²

SFB-800 双金属自润滑轴套 SFB-800 Bimetallic Self-lubricating Bushes


SFB-800系列双金属轴套、轴瓦、止推垫片，以优质低碳钢为基体，表面烧结青铜粉，适用于高载低速下的旋转，摇摆运动。具有摩擦系数低、耐磨性能好、使用寿命长、抗咬合性能好等特点，铜合金层可根据要求加工出各种类型的油穴、油槽。产品被广泛应用于矿山机械、汽机车、建筑机械、农用机械、轧钢机械等。

The SFB-800 series dual-metal bushings, bearing shells, and thrust washers are made of high-quality low-carbon steel with bronze powder sintered on the surface. They are suitable for rotational and oscillatory movements under high load and low speed conditions. They feature low friction coefficient, excellent wear resistance, long service life, and good anti-sticking performance. The copper alloy layer can be processed into various types of oil holes and oil grooves according to requirements. The products are widely used in mining machinery, automotive and locomotive equipment, construction machinery, agricultural machinery, and steel rolling machinery, etc.

材料特性 Material Characteristic


材料牌号 Material Trademark	合金成份 Alloy Composition	合金硬度 Alloy Hardness	国际标准 International Standard
SFB-800	CuPb10Sn10	70 ~ 100HB	SAE-797. DIN CuPb10Sn. JIS-LBC3. UNS C93700. Clevite F100. Daido L10. D. A. B. D57. Federal Mogul HF2. Glacier SY. Glyco66. Miba2. 1010. Taiho HF2. Kar I Schmiat KS940SSAE-797. DIN CuPb10Sn. JIS-LBC3. UNS C93700. Clevite F100. Daido L10. D. A. B D57. Federal Mogul HF2 Glacier SY. Glyco66. Miba2. 1010. Taiho HF2. Karl Schmiat Ks940s
SFB-720	CuPb24Sn4	45 ~ 70HB	SAE=799. GLYCO 68. JIS-LBC6. DAIDO L23. Claciersx. ACLF250
SFB-700	CuPb30	30 ~ 45HB	SAE-783. GLYCO74. JIS-AJL
SFB-20	AlSn20Cu	30 ~ 40HB	SAE-48. JIS-KJ3
SFB-930	CuPb6.5P0.1	69 ~ 90HB	

卷制轴承搭口形式 Material Characteristic

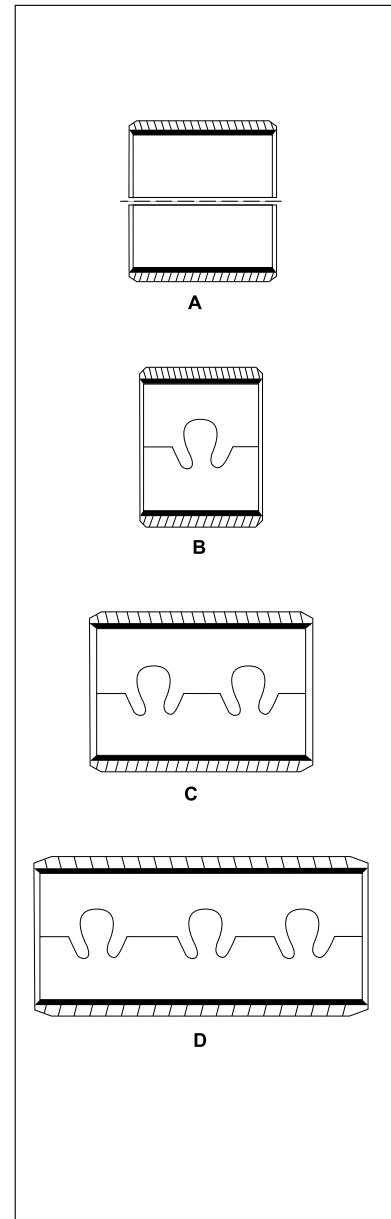

SFB-800 双金属自润滑轴套 SFB-800 Bimetallic Self-lubricating Bushes

双金属自润滑轴承的油槽形状 Bi-metal self-lubricating bearings tank shape

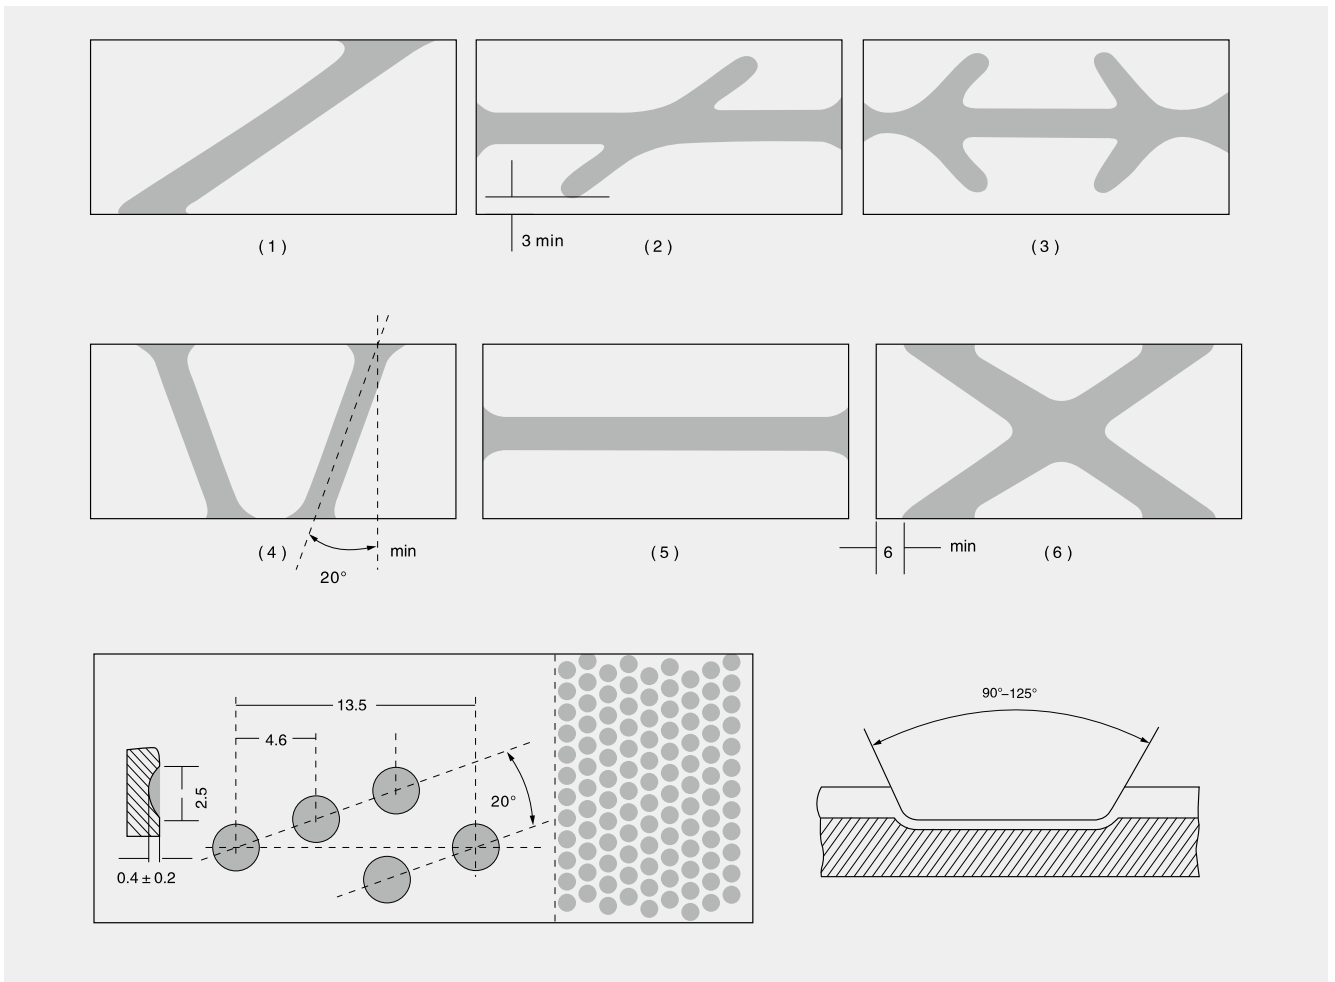

双金属轴套表面粗糙度 Surface Roughness of Bimetal Bushes:

项目 List	精密轴套(尺寸到位) Bronze Surface	轴套钢合金面 Bronze Surface
轴套钢合金面 Bronze Surface	R20.8	R26.3
钢背面 Steel Backing	R21.6	R210
其它表面 Other Surfaces	R22.5	R2100

根据DIN4768第一部分 According to DIN4768, Part1

SFB-800 双金属自润滑轴套 SFB-800 Bimetallic Self-lubricating Bushes


技术参数 Technical Data

性能指标 Performance index		型号 Type	SFB-800	SFB-720	SFB-700	SFB-20	SFB-930
最大承载 P (N/mm ²) Max Load Capacity			150	130	120	100	150
拉伸强度 (N/mm ²) Tensile Strength			185	150	200	200	185
最大线速度 (油润滑) V(m/s) Max Sliding Speed (Oil Lubrication)			5	10	15	25	5
摩擦系数μ Friction coefficient			0.05 ~ 0.20	0.06 ~ 0.16	0.08 ~ 0.16	0.08 ~ 0.17	0.06 ~ 0.16
最高PV值 N/mm ² ·m/s Max PV Value Limit	脂润滑 Grease lubrication		2.8	2.8	2.5	-	2.8
	油润滑 Oil lubrication		10	10	8	6	-

应用特性 Application Characteristics

材料牌号 Material Trademark	适用条件 Using Conditions	适用场合 Use Occasions
SFB-800	很高的耐疲劳强度和承载能力, 抗冲击能力强, 耐磨性、耐腐蚀性好 High resistance to fatigue strength and load capacity, with high shock resistance good wearing and good corrosion resistance.	中速、高冲击载荷的衬套, 内燃机连杆活塞销衬套 Fit for middle load, high speed, bushes, washer and connecting rod bearing in internal combustion engine used in machinical equipment and high shock bushing.
SFB-720	较高的耐疲劳强度和承载能力、较好的滑动性能, 易受润滑油腐蚀 Good resistance to fatigue strength and high load capacity, good performance of sliding, liable to be corrupted by lubricating oil.	中载中速、高速内燃机主轴套和连杆轴套 middle load middle speed, principle axis of internal combustion engine.
SFB-700	较高的耐疲劳强度、承载能力、抗冲击能力 Good resistance to fatigue strength, load capacity, shock resistance.	用于内燃机主轴和连杆轴承、止推垫片 Principle axis of internal combustion engine, connecting rod bushing.
SFB-20	良好的抗咬性、异物埋没性, 工作表面镀软合金层 Good performance of anti-seizing, covering eyewinker, soft alloy be plated on working surface.	高速中低载荷的内燃机主轴套, 连杆轴套 High speed, middle or low load, principle axis internal combustion engine
SFB-930	中等的耐疲劳强度和承载能力, 良好的抗腐蚀性能, 较好轴承滑动性能。 Moderate fatigue strength, and load capacity, good wrrosion resistance good performance of bearing sliding.	高速低载的内燃机轴瓦、气压机、制冷机轴套 High speed, low load, internal combustion engine half bearing, bushing used in compressing and refrigerating machine.

SFB-800 双金属轴承规格及公差 SFB-800 Bimetal Sleeve Bushing Specification & Tolerance

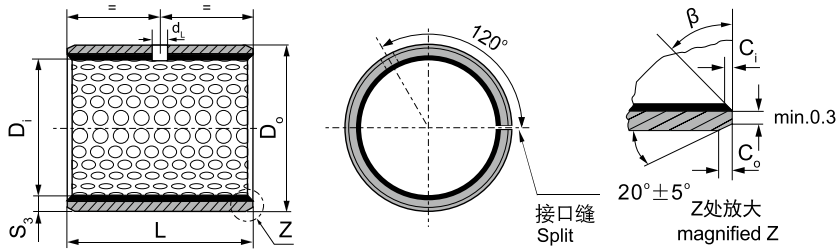

内外倒角 ID and OD chamfers

S ₃	C _o	C _i	β	S ₃	C _o	C _i	β
0.75	0.5±0.3	0.25±0.2	35°±5°	2.00	1.2±0.4	0.50±0.3	35°±5°
1.00	0.6±0.3	0.30±0.2	35°±5°	2.50	1.8±0.6	0.60±0.3	45°±5°
1.50	0.7±0.3	0.50±0.3	35°±5°				

单位 Unit: mm



内径 D _i φd	外径 D _o φD	轴径(h8) Shaft D _s	座孔(H7) Housing D _H	压装后 内孔公差 Arter fixed D _{ia}	配合间隙 Clearance C _D	壁厚 Wall thickness S ₃	油孔 Oil hole d _L	长度 L ⁰ _{-0.40}						
								10	15	20	25	30	40	50
10	12	10 -0.022	12 +0.018	+0.148 +0.010	0.170 0.010	0.995 0.935	4	1010	1015	1020				
12	14	12 -0.027	14 +0.018		0.175 0.010			1210	1215	1220				
14	16	14 -0.027	16 +0.018		1410			1415	1420					
15	17	15 -0.027	17 +0.018		1510			1515	1520					
16	18	16 -0.027	18 +0.018		1610			1615	1620					
18	20	18 -0.027	20 +0.021	+0.151 +0.010	0.178 0.010	1.490 1.430	6	1810	1815	1820	1825			
20	23	20 -0.033	23 +0.021	+0.161 +0.020	0.194 0.020			2010	2015	2020	2025			
22	25	22 -0.033	25 +0.021					2210	2215	2220	2225			
24	27	24 -0.033	27 +0.021					2410	2415	2420	2425	2430		
25	28	25 -0.033	28 +0.021					2515	2520	2525	2530			
26	30	26 -0.033	30 +0.021	+0.181 +0.040	0.214 0.040	1.980 1.920	8	2615	2620	2625	2630			
28	32	28 -0.033	32 +0.025	+0.185 +0.040	0.218 0.040			2815	2820	2825	2830	2840		
30	34	30 -0.033	34 +0.025					3015	3020	3025	3030	3040		
32	36	32 -0.039	36 +0.025					3215	3220	3225	3230	3240		
35	39	35 -0.039	39 +0.025					3520	3525	3530	3540	3550		
38	42	38 -0.039	42 +0.025	0.224 0.040	0.224 0.040	3820	3825	3830	3840	3850				
40	44	40 -0.039	44 +0.025			4020	4025	4030	4040	4050				

SFB-800 双金属轴承规格及公差 SFB-800 Bimetal Sleeve Bushing Specification & Tolerance

单位Unit: mm

内径 D _i φd	外径 D _o φD	轴径(h8) Shaft D _s	座孔(H7) Housing D _H	压装后 内孔公差 Arter fixed D _{i,a}	配合间隙 Clearance C _D	壁厚 Wall thickness S _s	油孔 Oil hole d _L	长度 L ⁰ _{-0.40}								
								25	30	40	50	60	80	90	100	
45	50	45 -0.039	50 +0.025	+0.225 +0.080	0.264 0.080	2.460 2.400	8	4525	4530	4540	4550					
50	55	50 -0.039	55 +0.030	+0.230 +0.080	0.269 0.080				5030	5040	5050	5060				
55	60	55 -0.046	60 +0.030					0.276 0.080		5530	5540	5550	5560			
60	65	60 -0.046	65 +0.030							6030	6040	6050	6060			
65	70	65 -0.046	70 +0.030							6530	6540	6550	6560			
70	75	70 -0.046	75 +0.030						7030	7040	7050	7060	7080			
75	80	75 -0.046	80 +0.030	+0.235 +0.080	0.281 0.080				7530	7540	7550	7560	7580			
80	85	80 -0.046	85 +0.035							8030	8040	8050	8060	8080	8090	
85	90	85 -0.054	90 +0.035					0.289 0.080		8530	8540	8550	8560	8580	8590	85100
90	95	90 -0.054	95 +0.035								9040	9050	9060	9080	9090	90100
95	100	95 -0.054	100 +0.035									9550	9560	9580	9590	95100
100	105	100 -0.054	105 +0.035									10050	10060	10080	10090	100100
105	110	105 -0.054	110 +0.035									10550	10560	10580	10590	105100
110	115	110 -0.054	115 +0.035									11050	11060	11080	11090	110100
115	120	115 -0.054	120 +0.035							11550	11560	11580	11590	115100		
120	125	120 -0.054	125 +0.040	+0.240 +0.080	0.303 0.080					12050	12060	12080	12090	120100		
125	130	125 -0.063	130 +0.040							12560	12580	12590	125100			
130	135	130 -0.063	135 +0.040							13060	13080	13090	130100			
135	140	135 -0.063	140 +0.040							13560	13580	13590	135100			
140	145	140 -0.063	145 +0.040							14060	14080	14090	140100			
150	155	150 -0.063	155 +0.040							15060	15080	15090	150100			

SFB-800F 双金属翻边轴承规格及公差 SFB-800F Bimetal Flange Bushing Specification & Tolerance

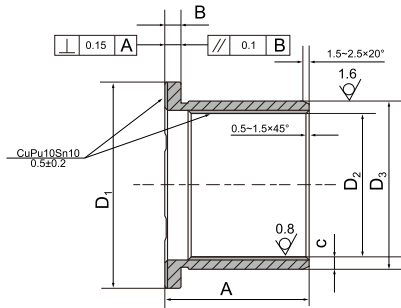


单位Unit: mm

D ₁	B	D ₃	D ₂	A	C
42	3.5	37	30	30	3.5
43	2	34	30	28	2
44	3.5	39	32	35	3.5
47	3.5	39	32	50	3.5
48	2	39	35	37	2
52	3	41	35	35	3
55	3.5	42	35	35	3.5
55	3.5	45	38	35	3.5
55	3.5	45	38	40	3.5
60	3	41	35	42	3
60	3	46	40	62	3
63	3.5	47	40	40	3.5
65	3.5	52	45	40	3.5
68	3.5	54	47	35	3.5
70	3.5	54	47	40	3.5
70	3.5	57	50	48	3.5
72	3.5	57	50	45	3.5
72	3.5	57	50	50	3.5
75	3.5	57	50	50	3.5
77	3	60	54	55	3
83	3.5	66	59	53	3.5
85	3.5	65	58	60	3.5
87	3.5	67	60	53	3.5
87	3.5	67	60	60	3.5

D ₁	B	D ₃	D ₂	A	C
87	3.5	67	60	65	3.5
87	4	68	60	60	4
94	3.5	72	65	60	3.5
87	3.5	72	65	65	3.5
87.5	1.95	69.12	65.22	64.5	2
88	3.5	67	60	60	3.5
88	3.5	72	65	65	3.5
92	3.5	77	70	67	3.5
93	3.5	75	68	60	3.5
94	3.5	77	70	70	3.5
95	3.5	77	70	65	3.5
95	4	78	70	70	4
97	3.48	77.14	70.18	62	3.5
97	3.5	82	75	74	3.5
100	5	85	75	70	5
103	3.525	70.8	63.75	73	3.5
105	3.5	82	75	75	3.5
105	3.5	87	80	70	3.5
107	4	83	75	74	4
115	5	100	90	75	5
128	3.8	92.6	85	103	4
108	3.5	72	65	75	3.5
108	3.5	77	70	98	3.5
108	5	80	70	90	5

SFB-08G 固体润滑轴承规格及公差 SFB-08G Solid-lubricant Bushing Specification & Tolerance

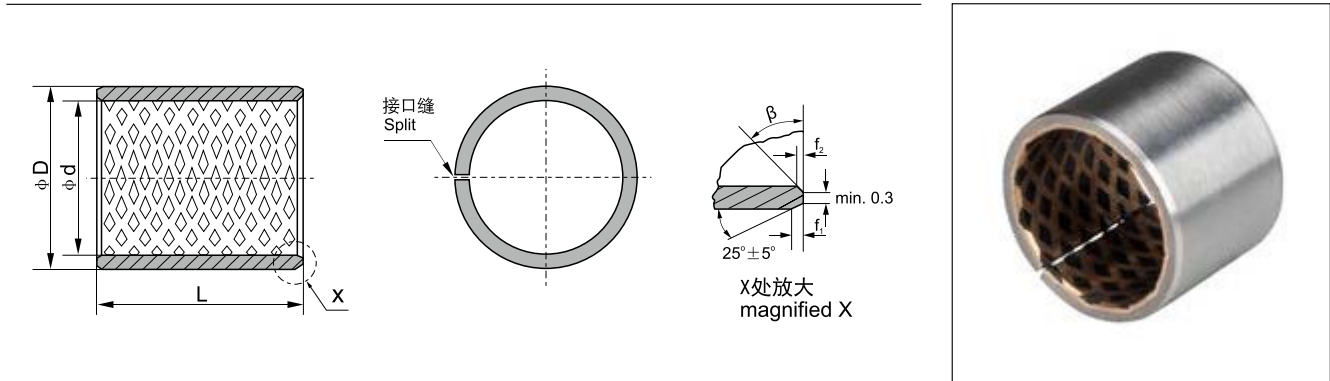

单位Unit: mm

d	D	f ₁	f ₂	L ⁰ _{-0.40}														
				10	15	20	25	30	35	40	50	60	70	80	90	100		
10	12	0.3	0.5	1010	1015	1020												
12	14			1210	1215	1220												
14	16			1410	1415	1420	1425											
15	17			1510	1515	1520	1525											
16	18			1610	1615	1620	1625											
18	20			1810	1815	1820	1825											
20	23	0.8	0.4	2010	2015	2020	2025											
22	25			2210	2215	2220	2225	2230										
24	27			2415	2420	2425	2430											
25	28	1.0	0.6	2515	2520	2525	2530											
28	32			2815	2820	2825	2830											
30	34			3015	3020	3025	3030	3035	3040									
32	36			3215	3220	3225	3230	3235	3240									
35	39	1.2	0.8	3515	3520	3525	3530	3535	3540									
40	44			4020	4025	4030	4035	4040	4050									
45	50			4520	4525	4530	4535	4540	4550									
50	55			5020	5025	5030	5035	5040	5050	5060								
55	60			5520	5525	5530	5535	5540	5550	5560								
60	65			6025	6030	6035	6040	6050	6060	6070								
65	70			6530	6535	6540	6550	6560	6570									
70	75			7030	7035	7040	7050	7060	7070	7080								
75	80			7530	7535	7540	7550	7560	7570	7580								
80	85			8030	8035	8040	8050	8060	8070	8080								
85	90				8540	8550	8560	8570	8580	8590								
90	95				9040	9050	9060	9070	9080	9090								
95	100							9550	9560	9570	9580	9590	95100					
100	105	1.4	0.8							10050	10060	10070	10080	10090	100100			
105	110											10550	10560	10570	10580	10590	105100	
110	115											11050	11060	11070	11080	11090	110100	
115	120											11550	11560	11570	11580	11590	115100	
120	125												12060	12070	12080	12090	120100	
125	130												12560	12570	12580	12590	125100	
130	135												13060	13070	13080	13090	130100	
135	140												13560	13570	13580	13590	135100	
140	145												14060	14070	14080	14090	140100	
145	150												14560	14570	14580	14590	145100	
150	155										15060	15070	15080	15090	150100			
155	160										15560	15570	15580	15590	155100			
160	165										16060	16070	16080	16090	160100			

SFB-500 固体润滑轴套 SOLID LUBRICANT-INLAID BUSHING



结构特性及用途

Structure Characteristics and Applications

该产品以特殊配方的高力黄铜为基体有很高的力学性能、铸造性能良好、耐蚀性较好，表面按一定的角度和密度镶嵌特殊配方的固体润滑剂，经精密加工而成。产品广泛应用于注塑机、连铸机、矿山机械、船舶、气轮机等。

It is backed with strengthening brass that has good physical performance and good capability for casting. What's more, the brass backing has pretty good anti-erosion ability in air, fresh water and seawater. The surface is regularly and finely machined with sockets in which particular solid lubricant is filled. The product is widely used on consecutive casting and rolling machines, mine-exploiting equipments, ships, steam engine, etc.

轴承高度和壁厚的设计

Bearing design height and thickness

轴承高度：轴承内径是由对磨轴的轴径所决定，所以在受载荷条件下，轴承高度受轴承承载压力 $P(N/mm^2)$ 所决定，一般轴承以 L/D (轴承高度/轴承内径)的比例在0.5-3的范围内为适当，但应特别注意在高载荷，易引起偏位接触，高转速时引起的发热情形，此时 L/D 取1以下较适当。

轴承壁厚：滑动轴承跟滚动轴承相比，其壁厚限制较小，壁厚薄为其主要的优点之一。一般情况下，壁厚 $t=(0.05\sim 0.07)d+(2\sim 5)mm$ 。

Bearing Height: bearing diameter from the shaft, the shaft is determined, so by loading conditions, load bearing by bearing a high pressure $P(N/mm^2)$ of the decision, usually bearing the L/D (bearing height / bearing diameter), the ratio in the range of 0.5-3 for the appropriate, but should pay particular attention to the high load, easy cause deviation contacts, high-speed situations caused by heat, then L/D is more appropriate to take the following 1.





Bearing wall: plain bearings with rolling bearings compared to the wall thickness less restricted, thin wall thickness of one of its main advantages. Under normal circumstances, the wall thickness $t=(0.05\sim 0.07)d+(2\sim 5)mm$.

使用注意事项

Caution

1. 装配前，若以润滑油涂于磨件上，可减短走合期，利于机械操作、运转；
2. 装配时请擦干净表面异物，最好采用冷冻装配，如无条 件，则应徐徐压入，严禁敲打，以免伤及轴承及引起变形；
3. 使用后的工作面，因固体润滑剂形成的油膜导致表面有黑色或灰黑色现象，请不要擦洗，照常使用；
4. 工作环境具有腐蚀性的场合或在水中使用时，对磨轴建议 使用不锈钢或表面镀铬。


- 1 Before assembly, on the terms of lubricant applied to the grinding parts can be cut short walk in period, is conducive to operation of machinery, running;
2. clean the surface of the assembly when foreign body, preferably refrigerated assembly, such as unconditional, they should slowly push, non-beating, to avoid harming the bearings and cause deformation;
3. Face after use, due to solid lubricant film lead to the formation of black or gray surface phenomenon, do not scrub, as usual;
4. working environment where corrosive or in water use, the shaft is recommended the surface of stainless steel or chrome.

	SFB-500 镶嵌式固体润滑轴承 Embedded Solid Lubricating Bearings	SFB-501 镶嵌式固体润滑轴承 Embedded Solid Lubricating Bearings	SFB-502 镶嵌式固体润滑轴承 Embedded Solid Lubricating Bearings	SFB-503 镶嵌式固体润滑轴承 Embedded Solid Lubricating Bearings	SFB-504 镶嵌式固体润滑轴承 Embedded Solid Lubricating Bearings
参数 Parameters					
成分牌号 Chemical Compositions	CuZn25Al6Fe3Mn3	CuSn6Zn6Pb3	Steel+CuSn6Zn6Pb3	HT250	GCr15
摩擦因数 Friction coef	< 16 μ	< 15 μ	< 14 μ	< 18 μ	< 17 μ
线膨胀系数 Dilatibility	1.6-2.0 10 ⁻⁵ /°C	1.6-2.0 10 ⁻⁵ /°C	1.6-2.0 10 ⁻⁵ /°C	1.7-1.9 10 ⁻⁵ /°C	1.6-1.8 10 ⁻⁵ /°C
硬度 Hardness	210-250HB	80-120HB	60-90HB	180-230HB	HRC55-60
最高滑动速度 (无润滑) Velocity Max. (dry)	0.4 (m/s)	2 (m/s)	2 (m/s)	0.5 (m/s)	0.1 (m/s)
最高滑动速度 (油润滑) Velocity Max. (Oil)	5 (m/s)	10 (m/s)	10 (m/s)	5 (m/s)	3 (m/s)
最高PV值 (无润滑) Max PV Value (dry)	1.8 N/mm ² - m/s	1.8 N/mm ² - m/s	1.8 N/mm ² - m/s	1.8 N/mm ² - m/s	1.8 N/mm ² - m/s
最高PV值 (油润滑) Max PV Value (Oil)	1.8 N/mm ² - m/s	1.8 N/mm ² - m/s	1.8 N/mm ² - m/s	1.8 N/mm ² - m/s	1.8 N/mm ² - m/s
最高使用温度 Temperature Max.	300°C	350°C	300°C	400°C	350°C
适用情况 Applicable conditions	高载荷 High load 低速 Low speed 一般用 Commonly used	低载荷 Low load 高温 High Temp. 低速 Low speed	低载荷 Low load 高温 High Temp. 低速 Low speed 节约成本 Cost Saving	高载荷 High load 低速 low speed	低载荷 Low load 低速 Low speed

固体润滑剂 Solid Lubricant

固体润滑剂 Lubricant	特性 Features	典型用途 Typical application
高纯石墨+添加剂 SL1 Graphit+add	很好的耐磨性和化学稳定性, 使用温度 <400°C Excellent resistance against chemical attacks and low friction, Temp limit 400°C	应用于一般机械, 在大气中使用 Suit for general machines under atmosphere
Si4+MoS ₂ PTFE+MoS ₂ +CF	极低的摩擦系数和良好的润滑性, 使用温度 <300°C Lowest in friction and good of water Lubrication, Temp limit 300°C	应用于水、海水润滑、如船舶 Suit for water and seawater lubricating

SFB-500A 自润滑直套轴承标准公制尺寸 SFB-500A Self-lubricating Straight Bearings Standard Metric Size

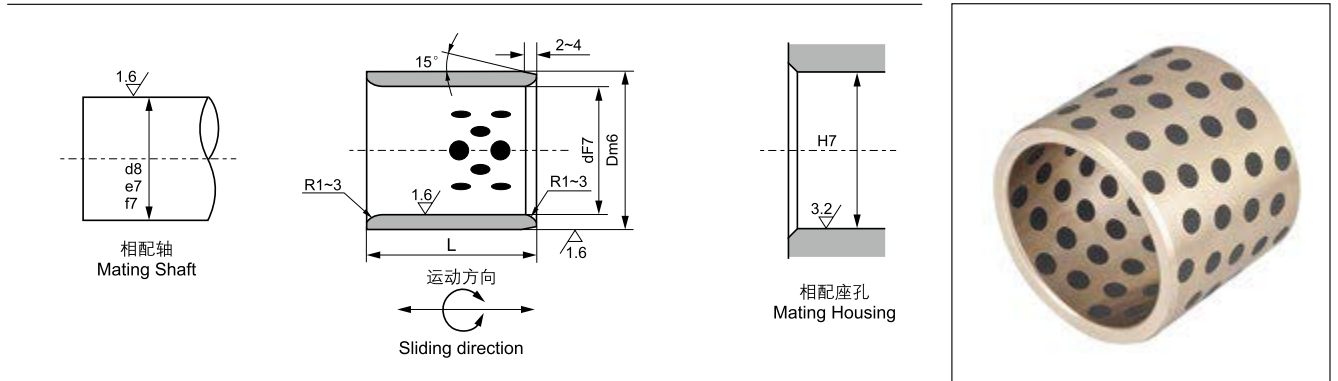

单位Unit: mm


d	D	dF7	D m6	L ^{-0.10} / _{-0.30}															
				8	10	12	15	16	20	25	30	35	40	50	60	70	80		
8	12	8	12		081208	081210	081212	081215											
10	14	10	14		101408	101410	101412	101415	101416	101420									
12	18	12	18			121810	121812	121815	121816	121820	121825	121830							
13	19	13	19			131910	131912	131915	131916	131920	131925	131930							
14	20	14	20			142010	142012	142015	142016	142020	142025	142030							
15	21	15	21			152110	152112	152115	152116	152120	152125	152130	152135						
16	22	16	22			162210	162212	162215	162216	162220	162225	162230	162235	162240					
18	24	18	24			182410	182412	182415	182416	182420	182425	182430	182435	182440					
20	28	20	28			202810	202812	202815	202816	202820	202825	202830	202835	202840	202850				
22	32	22	32				223212	223215	223216	223220	223225	223230	223235	223240	223250				
25	33	25	33					253312	253315	253316	253320	253325	253330	253335	253340	253350	253360		
30	38	30	38					303812	303815	303816	303820	303825	303830	303835	303840	303850	303860		
35	45	35	45							354520	354525	354530	354535	354540	354550	354560	354570		
40	50	40	50							405020	405025	405030	405035	405040	405050	405060	405070	405080	
45	55	45	55									455530	455535	455540	455550	455560	455570	455580	
50	60	50	60									506030	506035	506040	506050	506060	506070	506080	

SFB-500A 自润滑直套轴承标准公制尺寸 SFB-500A Self-lubricating Straight Bearings Standard Metric Size

单位Unit: mm

d	D	dF7	Dm6	L ^{-0.10} / _{-0.30}															
				30	35	40	50	60	70	80	100	120	130	140	150				
50	62	50	62	+0.050 +0.025	506230	506235	506240	506250	506260	506270									
50	65	50			506530	506535	506540	506550	506560	506570	506580	5065100							
55	70	55	70	+0.030 +0.011	557030	557035	557040	557050	557060	557070	557080	5570100							
60	74	60			607430	607435	607440	607450	607460	607470	607480	6074100							
60	75	60			607530	607535	607540	607550	607560	607570	607580	6075100							
63	75	63				637535	637540	637550	637560	637570	637580	6375100							
65	80	65					658035	658040	658050	658060	658070	658080	6580100						
70	85	70			85	+0.060 +0.030		708535	708540	708550	708560	708570	708580	7085100					
70	90	70						709035	709040	709050	709060	709070	709080	7090100					
75	90	75					759040	759050	759060	759070	759080	7590100							
75	95	75					759540	759550	759560	759570	759580	7595100	7595120						
80	96	80	96	+0.035 +0.013					809640	809650	809660	809670	809680	8096100	8096120	8096130			
80	100	80							8010040	8010050	8010060	8010070	8010080	80100100	80100120	80100130	80100140		
90	110	90								9011050	9011060	9011070	9011080	90110100	90110120	90110130	90110140		
100	120	100									10012060	10012070	10012080	100120100	100120120	100120130	100120140		
110	130	110	130	+0.071 +0.036								11013080	110130100	110130120	110130130	110130140			
120	140	120												12014080	120140100	120140120	120140130	120140140	
125	145	125	145	+0.040 +0.015								125145100	125145120	125145130	125145140				
130	150	130											130150100	130150120	130150130	130150140	130150150		
140	160	140			160	+0.083 +0.043								140160100	140160120	140160130	140160140	140160150	
150	170	150													150170100	150170120	150170130	150170140	150170150
160	180	160													160180100	160180120	160180130	160180140	160180150



SFB-500B 自润滑翻边轴承标准公制尺寸 SFB-500B Self-lubricating Flange Bearings Standard Metric Size

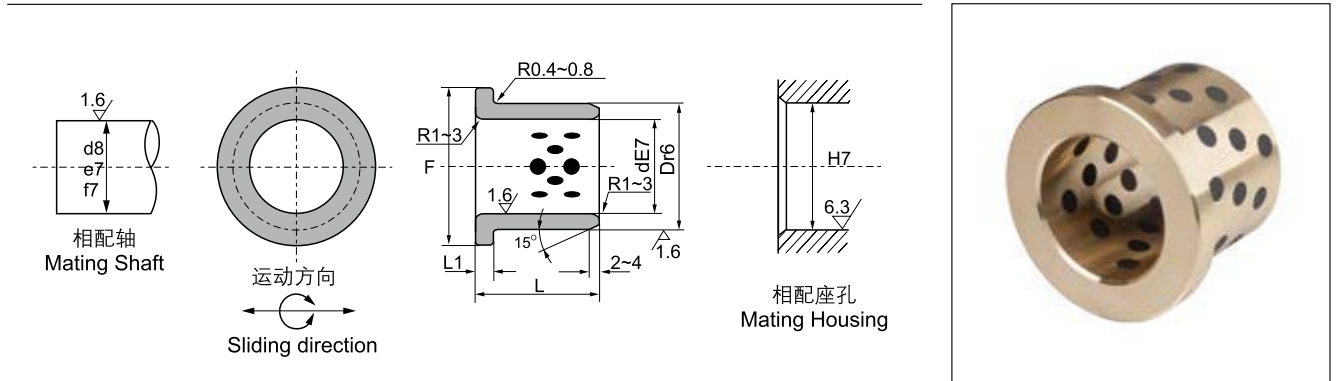

单位Unit: mm

d	D	dE7		Dr6		F	L ₁	L ^{-0.10} _{-0.30}												
								15	20	25	30	35	40	50	60	80	100			
10	14	10	+0.040 +0.025	14	+0.034 +0.023	22	2	1015	1020											
12	18	12		18		25		1215	1220											
13	19	13		19		26		1315	1320											
14	20	14	+0.050 +0.032	20		27	3	1415	1420	1425										
15	21	15		21	+0.041 +0.028	28		1515	1520	1525	1530									
16	22	16		22		29		1615	1620	1625	1630									
20	30	20		30		40			2020	2025	2030	2035								
25	35	25	+0.061 +0.040	35		45			2520	2525	2530	2535	2540							
30	40	30		40	+0.050 +0.034	50			3020	3025	3030	3035	3040	3050						
35	45	35		45		60				3525	3530	3535	3540	3550						
40	50	40	+0.075 +0.050	50		65	5				4030	4035	4040	4050						
45	55	45		55		70					4530	4535	4540	4550	4560					
50	60	50		60	+0.060 +0.041	75						5035	5040	5050	5060					
55	65	55		65		80							5540	5550	5560					
60	75	60		75	+0.062 +0.043	90						6040	6050	6060	6080					
70	85	70	+0.090 +0.060	85		105	7.5						7050	7060	7080					
75	90	75		90	+0.073 +0.051	110							7550	7560	7580	75100				
80	100	80		100		120									8060	8080	80100			
90	110	90		110	+0.076 +0.054	130									9060	9080	90100			
100	120	100	+0.107 +0.072	120		150	10								10060	10080	100100			
120	140	120		140	+0.088 +0.063	170									12060	12080	120100			


SFB-500C 自润滑止推垫片标准公制尺寸 SFB-500C Self-lubricating Thrust Washer Standard Metric Size



单位Unit: mm

型号规格 Standard No.	φd	φD	T _{-0.10} ⁰	螺孔 Bolt Hole			
				φD ₁	平头螺钉 Crop Bolt	φd ₁	孔数 Bore Number
SFB-500C-10	10.2	30	3	20	M3	3.5	2
SFB-500C-12	12.2			28			
SFB-500C-13	13.2						
SFB-500C-14	14.2						
SFB-500C-15	15.2	50	5	35	M5	6	
SFB-500C-16	16.2						
SFB-500C-18	18.2						
SFB-500C-20	20.2						
SFB-500C-25	25.2	55	7	40	M6	7	
SFB-500C-30	30.2	60		45			
SFB-500C-35	35.2	70					
SFB-500C-40	40.2	80					
SFB-500C-45	45.3	90	8	70	M8	9	
SFB-500C-50	50.3	100		75			
SFB-500C-55	55.3	110					
SFB-500C-60	60.3	120					
SFB-500C-65	65.3	125	10	90	M10	11	
SFB-500C-70	70.3	130		95			
SFB-500C-75	75.3	140					
SFB-500C-80	80.3	150					
SFB-500C-90	90.5	170	160	175			
SFB-500C-100	100.5	190					
SFB-500C-120	120.5	200					


SFB-500D 自润滑翻边轴套标准公制尺寸 SFB-500D Self-lubricant Flange Bushings Standard Metric Size

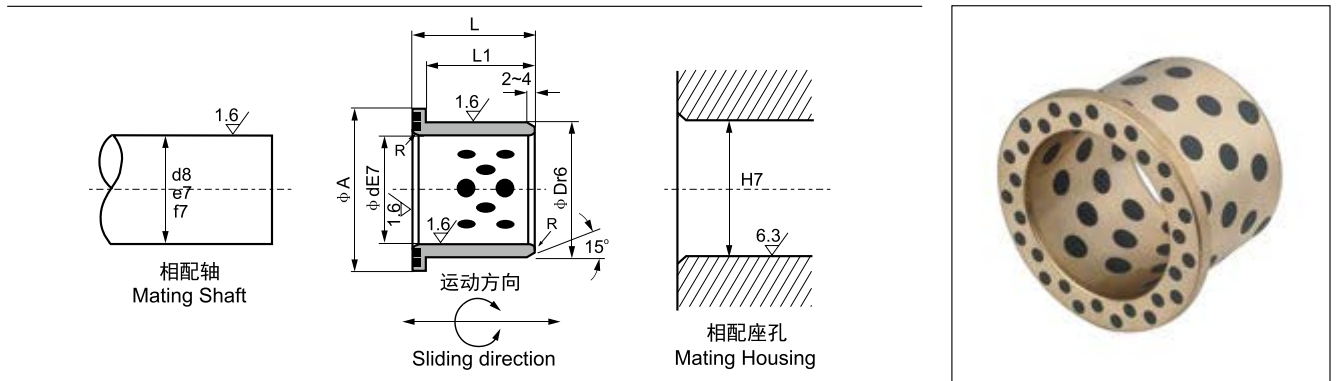

单位Unit: mm

型号规格 Standard No.	φd E7		φD r6		φA	L1	L
SFB-500D-12×15	12	+0.050 +0.032	18	+0.034 +0.023	25	11	15
SFB-500D-16×20	16		22	+0.041 +0.028	30	15	20
SFB-500D-20×25	20	+0.061 +0.040	28		+0.050 +0.034	36	20
SFB-500D-25×30	25		33	43		25	30
SFB-500D-30×35	30	+0.075 +0.050	38	48		30	35
SFB-500D-40×45	40		50	60		40	45
SFB-500D-50×55	50	+0.090 +0.060	62	+0.060 +0.041	75	49	55
SFB-500D-60×65	60		74	+0.062 +0.043	90	58	65

SFB-500E 自润滑导向套标准公制尺寸 SFB-500E Self-lubricant Guide Post Bushings Standard Metric Size

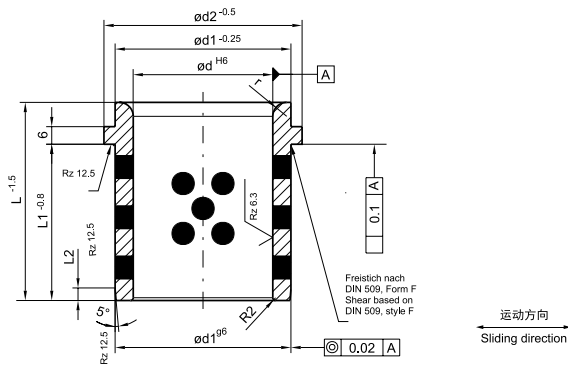


单位Unit: mm

型号规格 Standard No.	d	L	d1	d2	L1	L2	L3	r
SFB-500E-789	25	32	32	40	22	6,3	4	3
SFB-500E-799	25	40	32	40	30		4	3
SFB-500E-797	25	40	32	40	32		4	3
SFB-500E-796	24	40	32	40	32		4	3
SFB-500E-800	32	50	40	50	40		4	3
SFB-500E-801	40	63	50	63	50		5	3
SFB-500E-802	50	71	63	71	56	6,3	5	
SFB-500E-803	63	80	80	90	63	10	8	6
SFB-500E-804	80	100	100	112	80		10	8
SFB-500E-808	100	125	125	140	100		12,5	10
SFB-500E-805	100	125	125	140	106		12,5	10
SFB-500E-806	125	160	160	180	132		16	12
SFB-500E-807	160	200	200	220	170		16	18

SFB-500F 自润滑导向套标准公制尺寸

SFB-500F Self-lubricant Guide Ejector Bushings Standard Metric Size

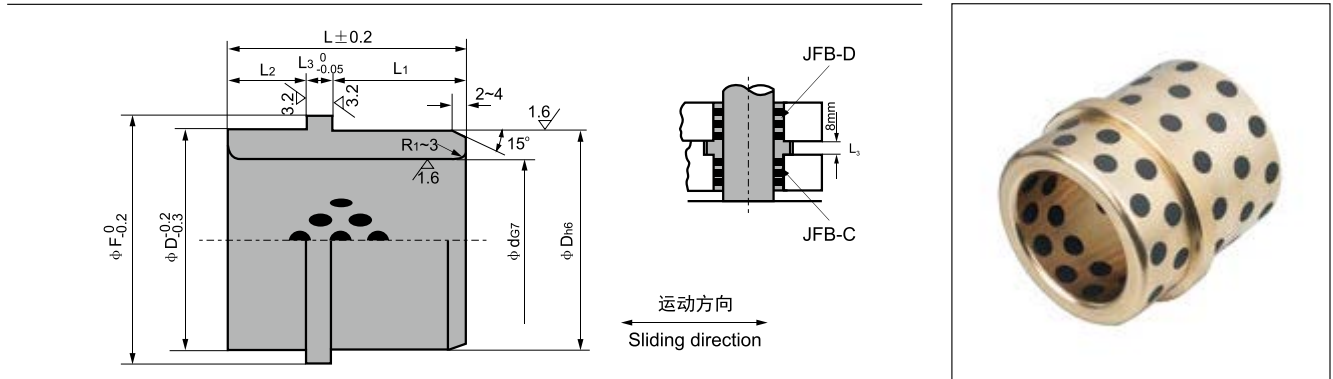


单位Unit: mm

型号规格 Standard No.	φd G7	φD h6	φF	L	L ₁	L ₂	L ₃
SFB-500F-10×24	10	16	21	24	10	4	4
SFB-500F-10×28				28	14		
SFB-500F-12×26	12	18	25	26	12	4	4
SFB-500F-12×28				28	14		
SFB-500F-13×26	13	22	25	26	12	4	4
SFB-500F-13×28				28	14		
SFB-500F-13×33				33	18		
SFB-500F-13×38				38	24		
SFB-500F-16×26	16	25	30	26	12	4	4
SFB-500F-16×28				28	14		
SFB-500F-16×33				33	19		
SFB-500F-16×38				38	24		
SFB-500F-20×26	20	30	35	26	12	4	4
SFB-500F-20×28				28	14		
SFB-500F-20×33				33	19		
SFB-500F-20×38				38	24		
SFB-500F-25×26	25	35	40	26	12	4	4
SFB-500F-25×28				28	14		
SFB-500F-25×33				33	19		
SFB-500F-25×38				38	24		
SFB-500F-30×33	30	40	45	33	14	4	4
SFB-500F-30×38				38	19		
SFB-500F-30×43				43	24		

型号规格 Standard No.	φd G7	φD h6	φF	L	L ₁	L ₂	L ₃
SFB-JOSG-32×38	32	42	47	38	19	4	4
SFB-JOSG-32×43				43	24		
SFB-JOSG-32×48				48	29		
SFB-JOSG-35×38	35	46	50	38	19	4	4
SFB-JOSG-35×43				43	24		
SFB-JOSG-35×48				48	29		
SFB-JOSG-40×48	40	52	57	48	24	4	4
SFB-JOSG-40×53				53	29		
SFB-JOSG-50×48	50	62	67	48	24	4	4
SFB-JOSG-50×53				53	29		
SFB-JOSG-30×37	30	42	47	37	14	4	4
SFB-JOSG-30×42				42	19		
SFB-JOSG-30×47				47	24		
SFB-JOSG-30×52				52	29		
SFB-JOSG-40×53	40	55	60	53	20	4	4
SFB-JOSG-40×57				57	24		
SFB-JOSG-40×60				60	29		
SFB-JOSG-40×67	40	55	60	67	29	4	4
SFB-JOSG-40×70				70	42		
SFB-JOSG-50×67	50	62	67	67	29	4	4
SFB-JOSG-50×87				87	39		
SFB-JOSG-60×67	60	74	82	67	29	4	4
SFB-JOSG-60×87				87	39		

SFB-500G 自润滑导向套标准公制尺寸 SFB-500G Self-lubricant Guide Post Bushings Standard Metric Size

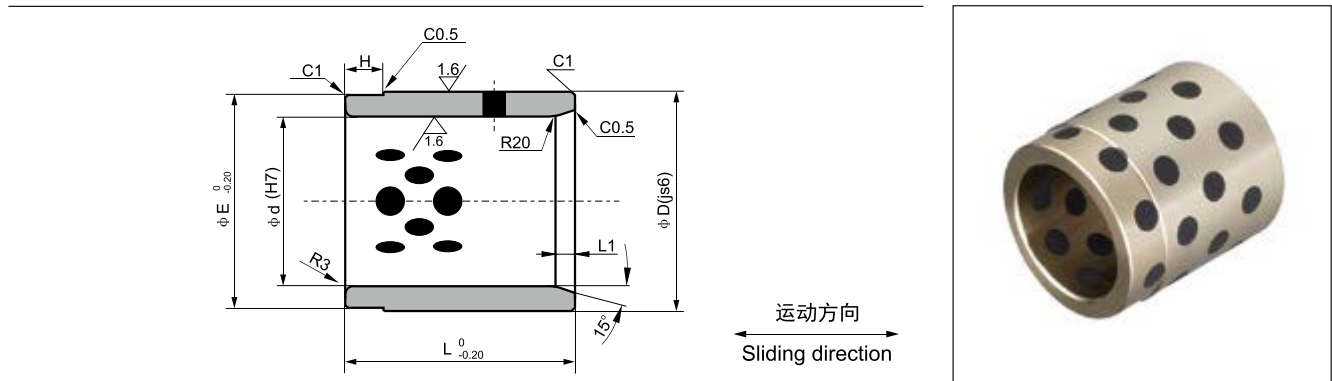


单位Unit: mm

型号规格 Standard No.	尺寸 Specification	$\Phi D (js6)$	$\phi d (H7)$	L	ΦE	H	L1
SFB-500G-30	50×30×50	50	30	50	49	10	5
SFB-500G-40	60×40×60	60	40	60	59	10	
SFB-500G-50	70×50×75	70	50	75	69	15	
SFB-500G-60	80×60×90	80	60	90	79	20	10
SFB-500G-80	100×80×120	100	80	120	99	25	
SFB-500G-100	120×100×150	120	100	150	119	25	
SFB-500G-120	140×120×180	140	120	180	139	25	
SFB-500G-30	50×30×50	50	30	50	49	10	5
SFB-500G-40	60×40×60	60	40	60	59	10	
SFB-500G-50	70×50×75	70	50	75	69	15	
SFB-500G-60	80×60×90	80	60	90	79	20	10
SFB-500G-80	100×80×120	100	80	120	99	25	
SFB-500G-100	120×100×150	120	100	150	119	25	
SFB-500G-120	140×120×180	140	120	180	139	25	

SFB-500H 自润滑导向套标准公制尺寸


SFB-500H Self-lubricant Guide Bushes Standard Metric Size

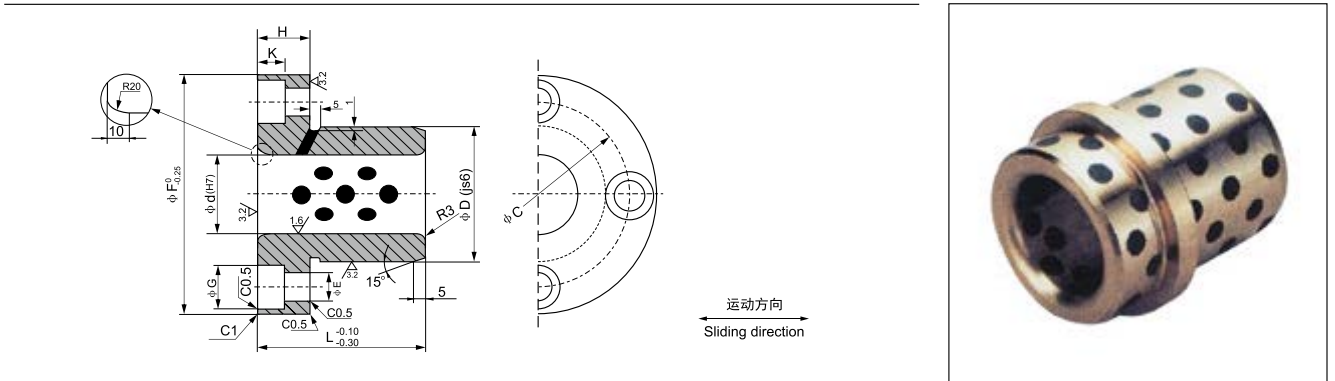

单位Unit: mm

项目 NO.	代号 Code	尺寸 Specification	ΦF	ΦD (js6)	Φd (H7)	H	L	ΦC	ΦE	ΦG	K
1	30	90×50×30×50	90	50	30	20	50	70	11	17.5	10.8
2	40	100×60×40×65	100	60	40	20	65	80	11	17.5	10.8
3	50	125×75×50×80	125	75	50	20	80	100	11	17.5	10.8
4	60	135×85×60×100	135	85	60	20	100	110	11	17.5	10.8
5	80	170×110×80×130	170	110	80	25	130	140	14	20	13
6	100	190×130×100×160	190	130	100	25	160	160	14	20	13


SFB-500I 滑块标准公制尺寸 SFB-500I Wear Plate Standard Metric Size

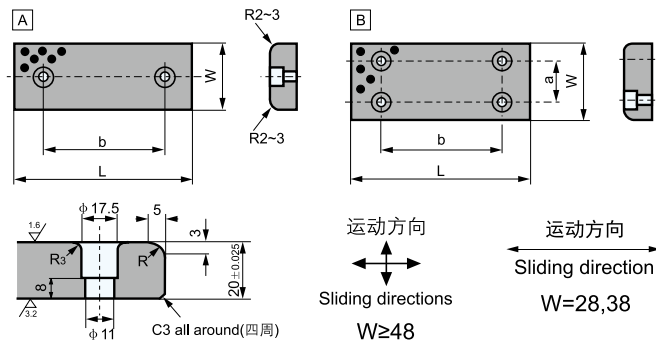

单位Unit: mm

型号规格 Standard No.	W	L	a	b	图示 Sketch
SFB-500I-28×75	28	75	-	45	A
SFB-500I-28×100		100		50	
SFB-500I-28×150		150		100	
SFB-500I-38×75	38	75	-	45	
SFB-500I-38×100		100		50	
SFB-500I-38×150		150		100	
SFB-500I-48×75	48	75	-	45	
SFB-500I-48×100		100		50	
SFB-500I-48×125		125		75	
SFB-500I-48×150		150		100	
SFB-500I-48×200		200		150	
SFB-500I-58×75	58	75	-	45	
SFB-500I-58×100		100		50	
SFB-500I-58×150		150		100	
SFB-500I-75×75	75	75	-	25	
SFB-500I-75×100		100		50	
SFB-500I-75×125		125		75	
SFB-500I-75×150		150		100	
SFB-500I-75×200		200		150	
SFB-500I-100×100	100	100	50	50	B
SFB-500I-100×125		125		75	
SFB-500I-100×150		150		100	
SFB-500I-100×200		200		150	
SFB-500I-100×250		250		200	
SFB-500I-100×300		300		200	
SFB-500I-125×125	125	125	50	75	
SFB-500I-125×150		150		100	
SFB-500I-125×200		200		150	
SFB-500I-125×250		250		200	
SFB-500I-125×300		300		200	
SFB-500I-125×350		350		200	
SFB-500I-150×150	150	150	100	100	
SFB-500I-150×200		200		150	
SFB-500I-150×250		250		200	


SFB-500J 滑板标准公制尺寸 SFB-500J Wear Plates Standard Metric Size

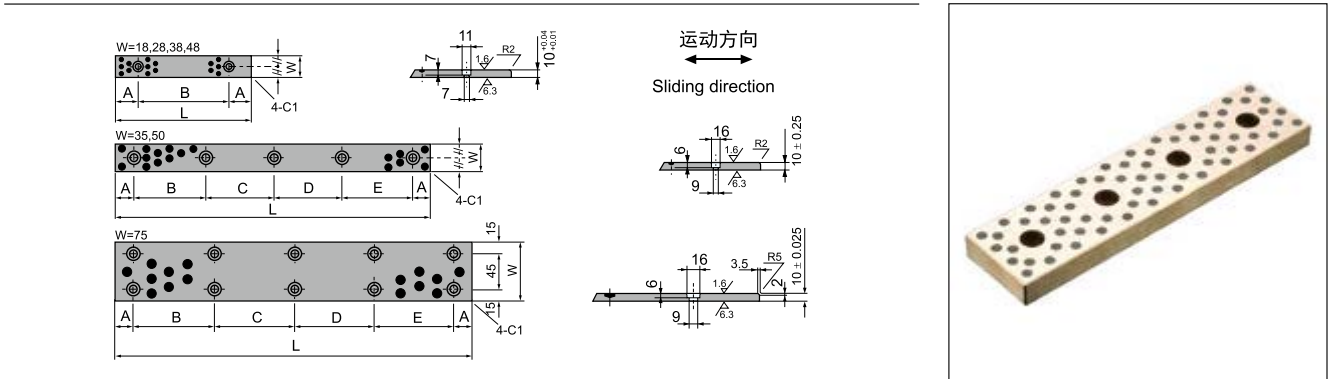

单位Unit: mm

型号规格 Standard No.	W	L	A	B	C	D	E	平头螺钉尺寸 Flat Head Screw Size	孔数 Q'ty of holes	
SFB-500J-1875	18	75	15	45				M6	2	
SFB-500J-18100		100		50						
SFB-500J-18125		125	25	75						
SFB-500J-18150		150		100						
SFB-500J-2875	28	75	15	45				M6	2	
SFB-500J-28100		100		50						
SFB-500J-28125		125	25	75						
SFB-500J-28150		150		100						
SFB-500J-35100	35	100	20	60				M8	3	
SFB-500J-35150		150		55	55					
SFB-500J-35200		200		55	50	55				
SFB-500J-35250		250		70	70	70				
SFB-500J-35300		300		65	65	65	65			
SFB-500J-35350		350		80	75	75	80			
SFB-500J-3875	38	75	15	45				M6	2	
SFB-500J-38100		100		50						
SFB-500J-38125		125	25	75						
SFB-500J-38150		150		100						
SFB-500J-4875	48	75	15	45				M6	2	
SFB-500J-48100		100		50						
SFB-500J-48125		125	25	75						
SFB-500J-48150		150		100						
SFB-500J-50100	50	100	20	60				M8	3	
SFB-500J-50150		150		55	55					
SFB-500J-50200		200		55	50	55				
SFB-500J-50250		250		70	70	70				
SFB-500J-50300		300		65	65	65	65			
SFB-500J-50400		400		90	90	90	90			
SFB-500J-75150	75	150	20	110				M8	4	
SFB-500J-75200		200		80	80					
SFB-500J-75250		250		105	105					
SFB-500J-75300		300		85	90	85				
SFB-500J-75400		400		120	120	120				
SFB-500J-75500		500		115	115	115	115			


SFB-500K 滑板标准公制尺寸 SFB-500K Wear Plates Standard Metric Size

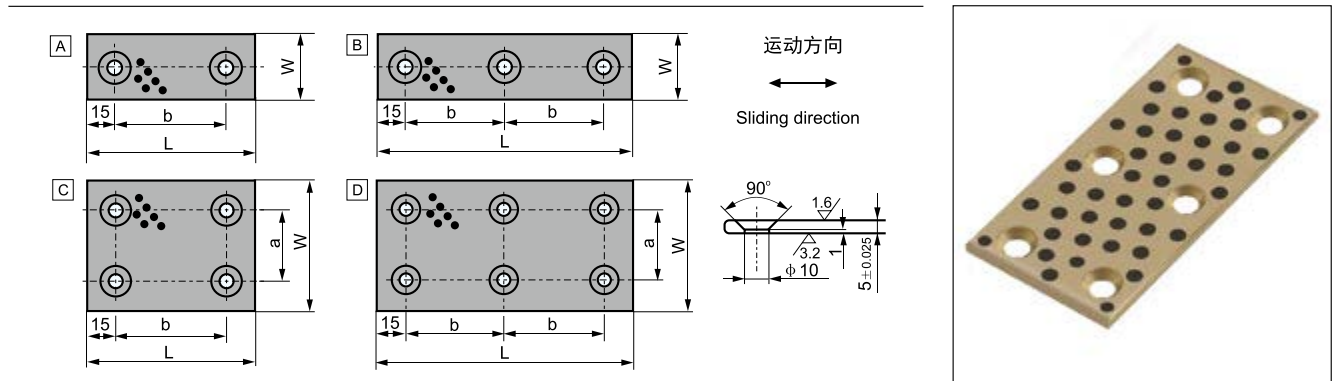

单位Unit: mm

型号规格 Standard No.	W	L	a	b	图示 Sketch
SFB-500K-18×50	18	50	-	20	A
SFB-500K-18×75		75		45	
SFB-500K-18×100		100		70	
SFB-500K-18×150		150		60	
SFB-500K-28×50	28	50	-	20	A
SFB-500K-28×75		75		45	
SFB-500K-28×100		100		70	
SFB-500K-28×150		150		60	
SFB-500K-38×50	38	50	-	20	A
SFB-500K-38×75		75		45	
SFB-500K-38×100		100		70	
SFB-500K-38×150		150		60	
SFB-500K-48×75	48	75	-	45	A
SFB-500K-48×100		100		70	
SFB-500K-48×125		125		95	
SFB-500K-48×150		150		60	
SFB-500K-75×75	75	75	45	45	C
SFB-500K-75×100		100		70	
SFB-500K-75×125		125		95	
SFB-500K-75×150		150		60	
SFB-500K-100×100	100	100	70	70	C
SFB-500K-100×125		125		95	
SFB-500K-100×150		150		60	

SFB-500L 滑板标准公制尺寸 SFB-500L Wear Plate Standard Metric Size

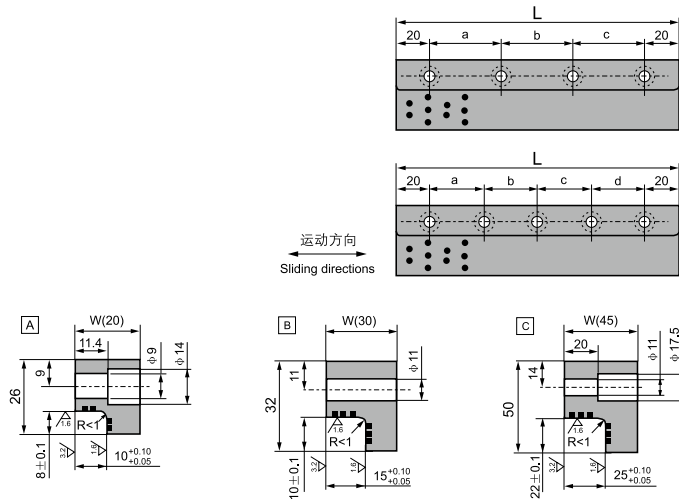

单位Unit: mm

型号规格 Standard No.	W	L	螺孔 Bolt Hole				螺孔 Size	数量 Q'ty	图示 Sketch
			a	b	c	d			
SFB-500L-20×100	20	100	60	--	--	--	M8	2	A
SFB-500L-20×150		150	55	55	--	--		3	
SFB-500L-20×200		200	55	50	55	--		4	
SFB-500L-30×100	30	100	60	--	--	--	M10	2	B
SFB-500L-30×150		150	55	55	--	--		3	
SFB-500L-30×200		200	55	50	55	--		4	
SFB-500L-30×250		250	70	70	70	--		4	
SFB-500L-45×200	45	200	55	50	55	--	M10	4	C
SFB-500L-45×250		250	70	70	70	--		4	
SFB-500L-45×300		300	65	65	65	65		5	
SFB-500L-45×350		350	80	75	75	80		5	

SFB-FZ 保持架系列 SFB-FZ Keep Series



FZH 铜基钢球保持架 Bronze Ball Retainer

该产品以铜基，配以优质钢球，按一定的角度和密度有序地排列，采用特殊工艺加工而成。产品适用于冷冲模具，精密机床等。

The basement of this product is copper. With the high quality roller being arranged orderly in certain angle and density, it is produced by special workmanship. This kind of products is used in punching mold and high-precision machine tools.

技术参数：Technical Data

最大承载压力 The maximum load	30N/mm ²	装配过盈 Assembly interference	0.01mm~0.02mm
----------------------------	---------------------	-------------------------------	---------------



FZL 铝基钢球保持架 Aluminium Ball Retainer

该产品以铝基为基体，配以优质钢球，按一定的角度和密度有序地排列，采用特殊工艺加工而成。产品适用于冷冲模具，精密机床等。

The basement of this product is aluminum. With the high quality roller being arranged orderly in certain angle and density, it is produced by special workmanship. This kind of products is used in punching mold and high-precision machine tools.

技术参数：Technical Data

最大承载压力 The maximum load	25N/mm ²	装配过盈 Assembly interference	0.01mm~0.02mm
----------------------------	---------------------	-------------------------------	---------------



FZP 树脂基钢球保持架 Resin Ball Retainer

该产品以POM为基体，配以优质钢球，按一定的角度和密度有序地排列，采用特殊工艺加工而成。产品适用于冷冲模具，精密机床等。

The basement of this product is POM. With the high quality roller being arranged orderly in certain angle and density, it is produced by special workmanship. This kind of products is used in punching mold and high-precision machine tools.

技术参数：Technical Data


最大承载压力 The maximum load	20N/mm ²	装配过盈 Assembly interference	0.01mm~0.02mm
----------------------------	---------------------	-------------------------------	---------------

球状误差和表面粗糙度：Error and the spherical surface roughnessData

单位Unit: mm

等级 Grade	球直径变动量 V _{DWS} (max)	球形误差 max	表面粗糙度 R _s (max)
G10	0.25	0.25	0.020
G16	0.4	0.4	0.025
G20	0.5	0.5	0.032

SFB-FZ 保持架系列 SFB-FZ Ball Retainer Standard Metric Sizes

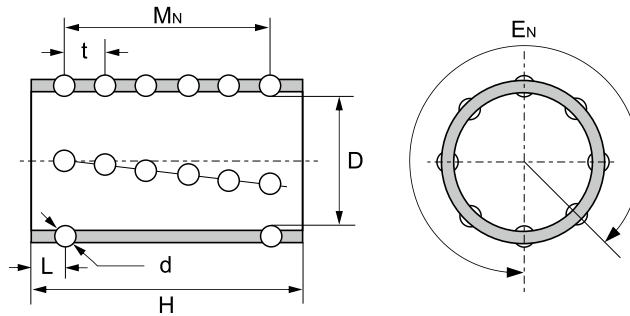

单位Unit: mm

型号规格 Designation	ϕD	H	ϕd	E_N	M_N	钢球数量 Balls	t	L
SFB-FZ□ 1950	19	50	3	12	8	96	5.5	5.75
SFB-FZ□ 1960		60			10	120		5.25
SFB-FZ□ 2050	20	50			8	96		5.75
SFB-FZ□ 2060		60			10	120		5.25
SFB-FZ□ 2250	22	50		14	8	112		5.75
SFB-FZ□ 2260		60			10	140		5.25
SFB-FZ□ 2360	23	60			10	140	5.25	
SFB-FZ□ 2475	24	75		16	13	208	5.45	4.80
SFB-FZ□ 2550	25	50			8	128	5.5	5.75
SFB-FZ□ 2560		60			10	160	5.25	
SFB-FZ□ 2775	27	75			13	208	5.45	4.80
SFB-FZ□ 2860	28	60		4	14	8	112	6.5
SFB-FZ□ 2875		75	11			154	5.0	
SFB-FZ□ 3060	30	60	8			112	7.25	
SFB-FZ□ 3075		75	11		154	5.0		
SFB-FZ□ 3260	32	60	16		8	128	7.25	
SFB-FZ□ 3275		75			11	176	5.0	
SFB-FZ□ 3685	36	85		12	192	6.75		
SFB-FZ□ 3690		90		13	208	6.0		
SFB-FZ□ 3870	38	70	5	16	8	128	8.0	7.0
SFB-FZ□ 3890		90			11	176	5.5	
SFB-FZ□ 4090	40	90			11	176	7.9	5.5
SFB-FZ□ 4590	45	90		18	11	195	5.5	
SFB-FZ□ 45110		110			13	234	8.0	7.0
SFB-FZ□ 5090	50	90		20	11	220	7.9	5.5
SFB-FZ□ 50110		110	13		260	8.0	7.0	
SFB-FZ□ 6090	60	90	22	11	242	7.9	5.5	
SFB-FZ□ 60110		110		13	286	8.0	7.0	
SFB-FZ□ 80130	80	130	28	15	420	8.0	9.0	

卷制类轴承尺寸公差检测方法 Wrapped Bushing Dimensional Inspection

卷制类产品的制造工艺决定了开口缝的存在,使得产品在自由状态下没有很好的圈整度,同时轴套外径和座孔之间为过盈配合,轴套要最大限度地适应座孔的形状,因此不能在自由状态下直接测量产品的内外径而必须使用特殊的测量仪和设备才能检测; ISO3547标准第2部分中对卷制类产品的公差检验作了明确的规定,包括:

检验方法A: 哈夫规检验外径;

检验方法B: 止通规检验外径;

检验方法C: 止通规检验内径;

检验方法D: 测量尺检验大规格产品外径

以及替代检验方法C的壁厚检验方法,壁厚检验方法和检验方法C不能同时使用。

Rolled products in the manufacturing process determine the existence of open joints, making products in the free state not have a good whole circle shape, while sleeve diameter and the seat for the interference fit between the holes, sleeve adapted to maximize Block hole shape can not be directly measured in the free state the inner/outside diameter of the product only can be by a special measuring instrument; In ISO3547 standards measured Part 2 of the rolled products made clear tolerance test requirements, including :

Test Method A: Huff regulatory test outside diameter;

Test method B: use stop-pass gauge to test the outside diameter;

Test method C: use stop-pass gauge to test the inside diameter;

Test method D: Measure the outer diameter of large scale product and use wall-thickness test to replace test method C. (Wall-thickness test and test method C can not be used at the same time.)

外径检验方法 External diameter test methods

检验方法A (ISO3547-2: Test A)

采用如右视图的上下两哈夫规对外径进行检验,检验时产品的开口缝朝上哈夫规相向施加检验载荷 F_{ch} , 该载荷使卷制轴套能够按符合要求的方式就位于检验模。检验中,由于弹性变形卷制轴套外径会变小但不会产生永久变形。产品的外径可以通过检验模之间的距离 Z 的变化量 ΔZ 来计算。

Test A of ISO 3547 Part 2

Check the outside diameter of a wrapped bush using measuring equipment as shown to the right, with a checking block consisting of upper and lower halves and setting plugs, at a determined checking load of F_{ch} , during the test the outside diameter of the bush is made smaller by the elastic reduction, however it is not a permanent deformation. The bushes outside diameter can be calculated from the difference in the value of z (ΔZ)

检验方法B (ISO3547-2: Test B)

检验采用两个环规即通规和止规,用手以最大力250N可将轴套推入并通过通规;在相同情况下无法进入和通过止规。在某些情况下检验精度可能受到影响,比如轴套不圆或闭合开口缝的力本身已超过250N,此时建议采用检验方法A或测压入力或壁厚相结合的检验方法。

Test B of ISO 3547 Part 2

The test is carried out with two ring gaugs, a Go gauge and a No Go gauge whose diameter Shall be chosen empirically from with Table 6 of ISO3547-1:1999 and agreed upon. It shall be possible to press the bushes into the GO gauge and then push them through with hand pressure (maximum force 250N). On the other hand with the same force, it shall not be possible for them to go into and through the NO GO gauge (See ISO 12307-1)


检验方法D (ISO3547-2: Test D)

采用精确的测量尺来测量外径,一般针对大规格的轴套外径检测。

Test D (ISO 3547-2)

The test is carried out by means of a precision measuring tape.

检验方法A Test A of ISO

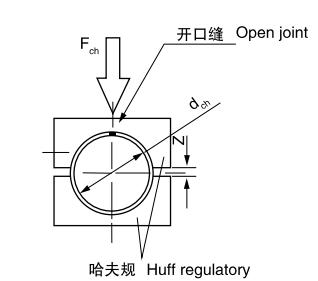


哈夫规和芯棒 $d_{ch} = \text{---} \text{mm}$
Checking block and setting mandrel

检验压力 $F_{ch} = \text{---} \text{N}$
Torce test

极限值 $\Delta z = \text{---} \text{and } \text{---} \text{mm}$
Limiting value

外径公差 $D_o = \text{---} \text{to } \text{---} \text{mm}$
OD tolerance

检验方法B Test B of ISO

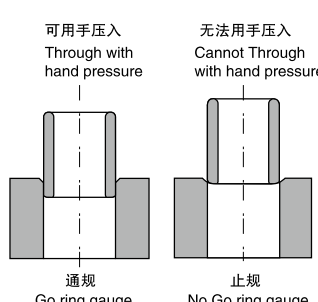

可用手压入
Through with hand pressure

无法用手压入
Cannot Through with hand pressure

通规
Go ring gauge

止规
No Go ring gauge

卷制类轴承尺寸公差检测方法 Wrapped Bushing Dimensional Inspection

内径检验方法 Internal diameter test methods

检验方法C (ISO3547-2: Test C)

将轴套压入基准环规后检查轴套的内径，内径的检测可以采用三点测量装置或通、止塞规检验。从实际使用考虑一般建议采用通、止塞规检验，此时在用手最大推力不超过250N时通端塞规可以通过轴套内孔，在相同情况下止端塞规应当无法通过轴套内孔。当轴套压入基准环规后，轴套外径可能会引起永久变形而无法正常使用。

Test C (ISO3547-2: Test C)

To check the inside diameter, the bush is to be pressed into a ring gauge, whose nominal diameter corresponds to the dimension specified in ISO3547-1:1999. The inside diameter shall be measured with a 3-point measuring instrument or checked with a GO and NO GO plug gauge. The GO plug gauge shall be inserted by a minimum effort; the NO GO plug gauge shall not be inserted by manual pressure (maximum force 250N). In order to enable the manufacturer and the customer to compare results of this test it should be agreed whether results should be obtained by measuring or by gauging.

止推片检验方法 Thrust washer test method


除了厚度公差以外，垫片的平行度对于垫片和对磨件的使用寿命同样重要。我们使用比较有效的检验方法来检测垫片的平行度，让垫片依靠自重来通过两个平行块；当然平行块必须大于垫片本身的规格。

Beside the thickness, the flatness of washer is also important for washer and grinding parts' usage age. We use very helpful test in which the washer falls through the gap between two plain parallel plates of a gauge under its dead weight. The plates must be big enough to cover the whole washer.


壁厚检测方法 Wall Thickness test method

作为检验方法C的替代方案两则不能同时使用，壁厚根据轴套尺寸在轴向进行测量。

The wall thickness is measured at once, two or three positions axially according to the bearing dimensions. The wall thickness and the inside diameter shall not be specified together on the same drawing.

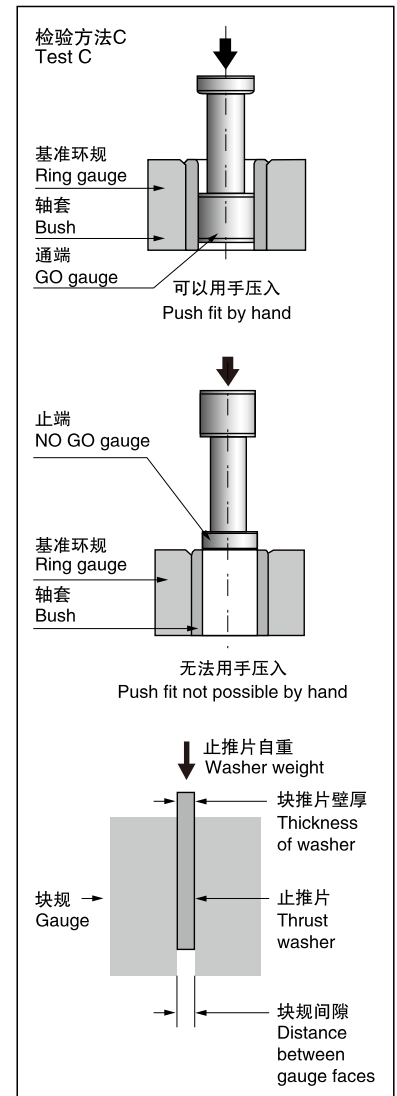


B[mm]	X[mm]	测量点 measurement position
$B \leq 15$	$B/2$	1
$15 < B \leq 50$	4	2
$50 < B \leq 90$	6 and $B/2$	3
$B > 90$	8 and $B/2$	3

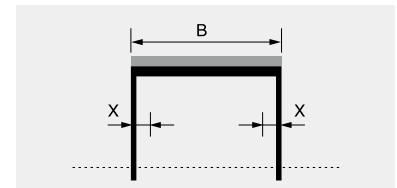


卷制类轴承的安装 Wrapped Bushing Installation


直套安装 Straight Set of installation

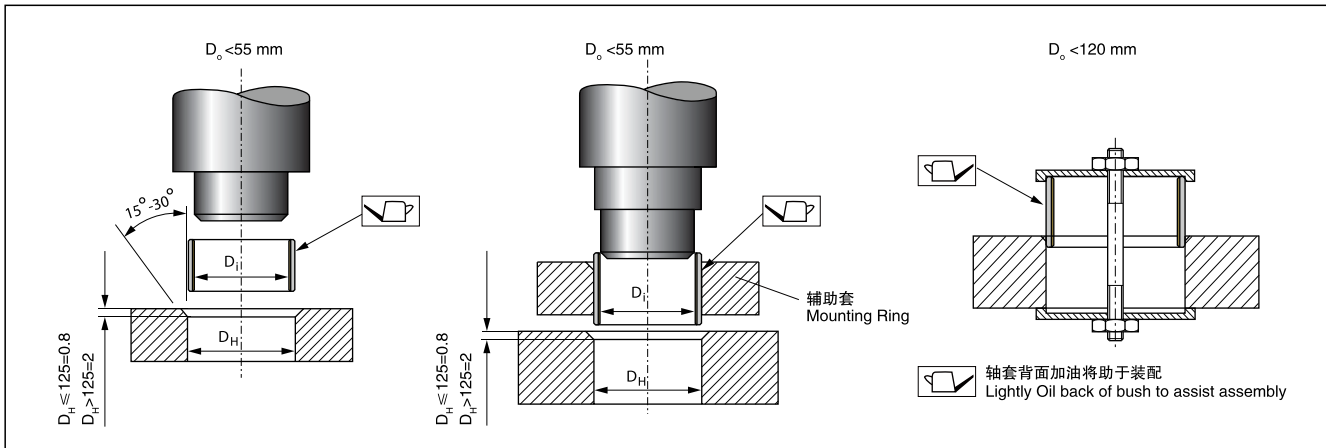

翻边套安装 Flange Set of installation

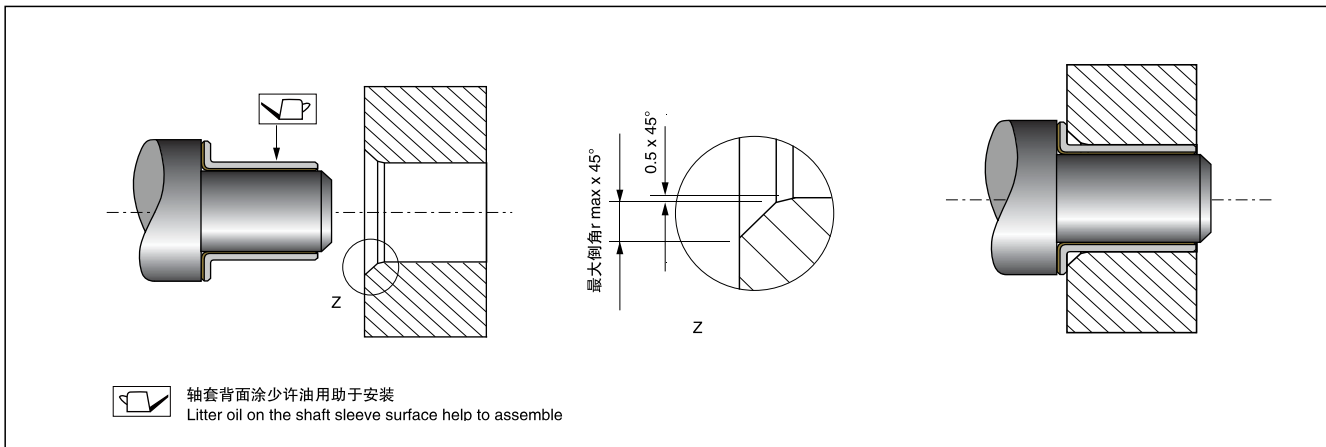

压入力计算 Indentation Calculation

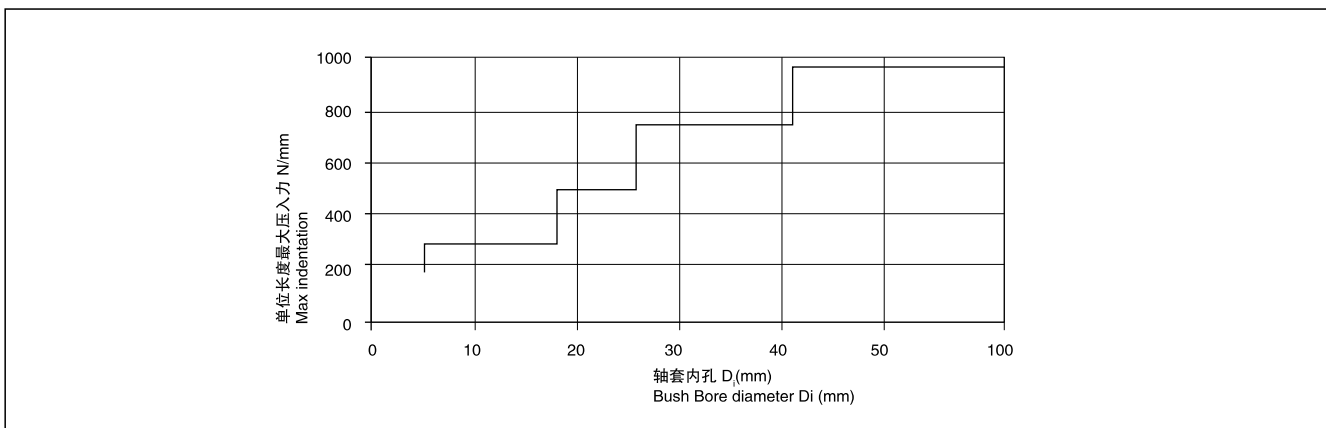

卷制类轴承的安装 Wrapped Bushing Installation

同轴度 Concentricity

精确的同轴度对于轴承的正常使用非常重要，要求轴套在一个或者两个长度内的不同轴度以及在翻边或止推片直径内的不同轴度控制在0.02mm内。


Degree of precision coaxial bearing the normal use for a very important requirement sleeve length in one or two degrees of the different axes and in the flange or thrust washer diameter of the different degree of control shaft within 0.02mm.

垫片和滑板的安装 Thrust washers and sliding plates installation


建议垫片和滑板安装在凹陷的座孔内，为了避免移动，同时建议采用定位销加以固定。

It is recommended to install the thrust washers and sliding plates with the hollow indented housing. To avoid the moving of such parts, a Dowel pins is recommended to be installed.


1. 定位销在垫片上的使用 Dowel pin application (thrust washer)

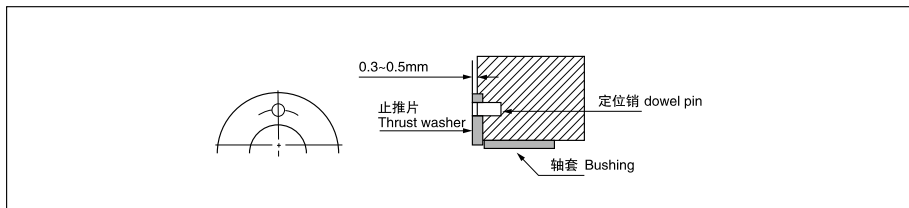

2. 定位销在滑板上的使用 Dowel pin used on slide plate

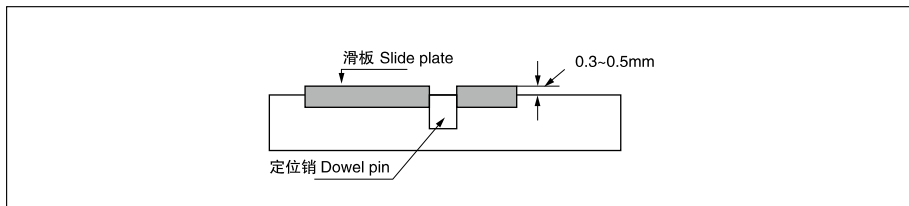



3. 平头螺丝的使用 Flat head screw application

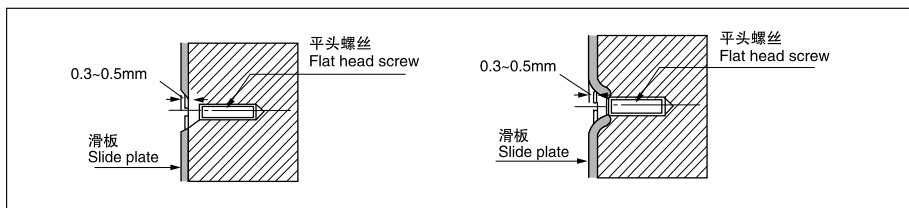

其他固定方法 Other fixation methods

当无法使用定位销时，可以采用激光焊接，粘结剂和钎焊（温度<320°C）的方法加以固定；此时必须注意使用的温度不能超过轴承材料本身能够承受的范围，轴套工作面防止与粘合剂等接触。

When the pin is not available, you can use laser welding, adhesives and brazing (temperature < 320 °C) method to be fixed; while do in this way, temperature used must not higher then the bearing material itself can be standed, the cleave face should be prevent from contacting with adhesives.

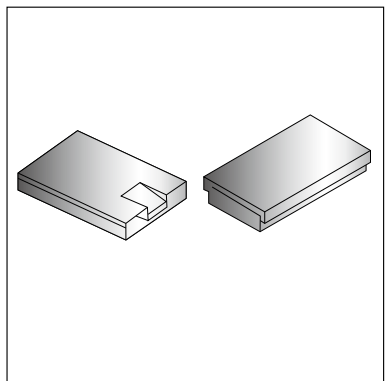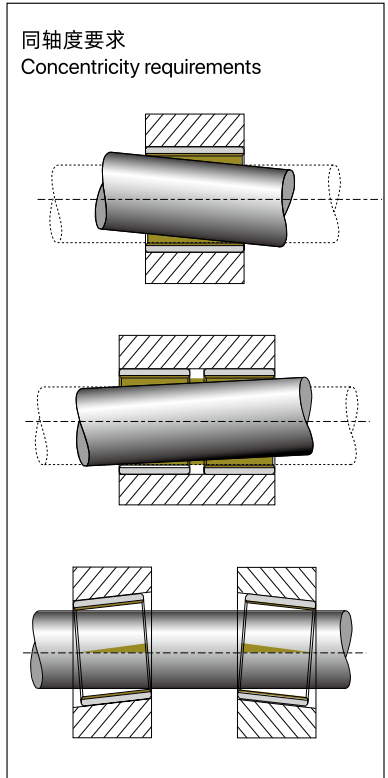

卷制类轴承的安装 Wrapped Bushing Installation

PTFE基轴承的加工和安装注意事项

Precautions for the processing and installation of PTFE-based bearings

PTFE基轴承一般都是成品零件, 组装后内孔不再进行铰、镗等加工, 若座孔按推荐的尺寸加工时, 卷制类轴承内径的真圆度完全能满足使用要求;

如果客户可以接受干摩擦性能大幅度降低, 可以对PTFE基轴承在安装后进行内孔挤压以达到更高的精度, 强烈建议对挤压芯棒表面进行热处理(深度0.6mm, HRC > 55)并抛光处理至Rz1;

当轴承的比压力小或摆动小而要求运行平稳时, 可以增大工作间隙, 在高温下使用时, 每升高100°C时建议轴径减少0.008mm;

若轴承座材质是青铜、铝或锌合金时, 建议减少轴承座孔以增加轴承装配过盈量; 为保证轴承座的刚性, 轴承座外径通常为轴承外径的1.5倍, 薄壁座孔使用时需要考虑压装和使用过程的产生的变形;

PTFE轴承需要加工时, 为了避免毛刺的产生建议从PTFE一侧进行加工或钻孔, 在钻孔过程中轴套应当有足够的支撑已确保不会由于钻孔压力导致变形; 带材的加工方法可以通过剪切、水切割、激光切割等方法。


PTFE-based bearings are generally finished parts, assembled in the hole without the hinge, and other processing, if the bore size of the recommended process, the rolling type bearings with bore roundness can meet the requirements;

If the client can accept a significant reduction of dry friction, extruding the inner holes on the PTFE-based bearing after the compression to achieve higher accuracy, we strongly recommend the extrusion mandrel surface treatment (depth of 0.6mm, HRC > 55) and polished to Rz1;

When the bearing's specific pressure is small and required to run a smooth swing, you can increase the working space, when used at high temperatures, it is increased by 100 °C, the proposed reduction of shaft diameter 0.008mm;

If the material of bearing is bronze, aluminum or zinc alloy, it is recommended to reduce the bearing hole to increase the amount of interference bearing assembly; to ensure the bearing rigidity, The base of bearing's diameter is usually 1.5 times to the bearing's diameter, thin-walled bore with pressure to consider when installed and used in the process of the deformation;

PTFE bearings need processing, in order to avoid the generation of burrs from the PTFE side of the proposed processing or drilling in the drilling process should have sufficient support sleeve has been to ensure that no pressure leads to deformation of the borehole; processing methods strip can cut, water jet cutting, laser cutting and other methods.

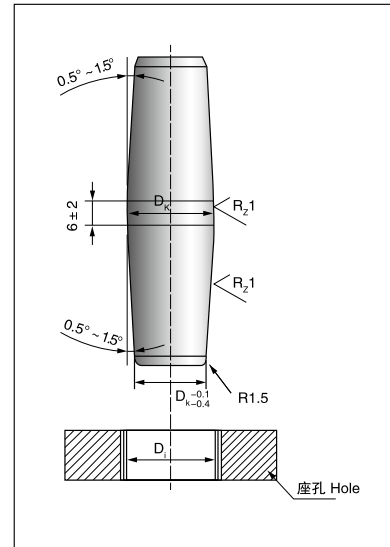

内孔 D _i Bore D _i	挤压芯棒 D _k Extrusion Mandrel D _k	使用寿命 Life
D _i	--	100%
D _i +0.02	D _i +0.06	80%
D _i +0.03	D _i +0.08	60%
D _i +0.04	D _i +0.10	30%

卷制类轴承的安装 Wrapped Bushing Installation


对磨轴 The shaft

对磨件的材料、表面硬度、表面粗糙度以及表面处理方式对于轴承的使用寿命的影响很大，一般情况下我们建议轴的硬度在HRC > 50，表面粗糙度Ra0.4以下；在潮湿或易腐蚀的场合建议使用不锈钢、硬质铬镀层。

Grinding pieces of material, surface hardness, surface roughness and surface treatments have a great impact on the life of bearing, in general, we recommend that the hardness of the shaft HRC > 50, surface roughness below Ra0.4; We suggest using stainless steel, hard chrome plating in the wet or corrosive place.

不正确的设计
Incorrect design


正确的设计
Correct design

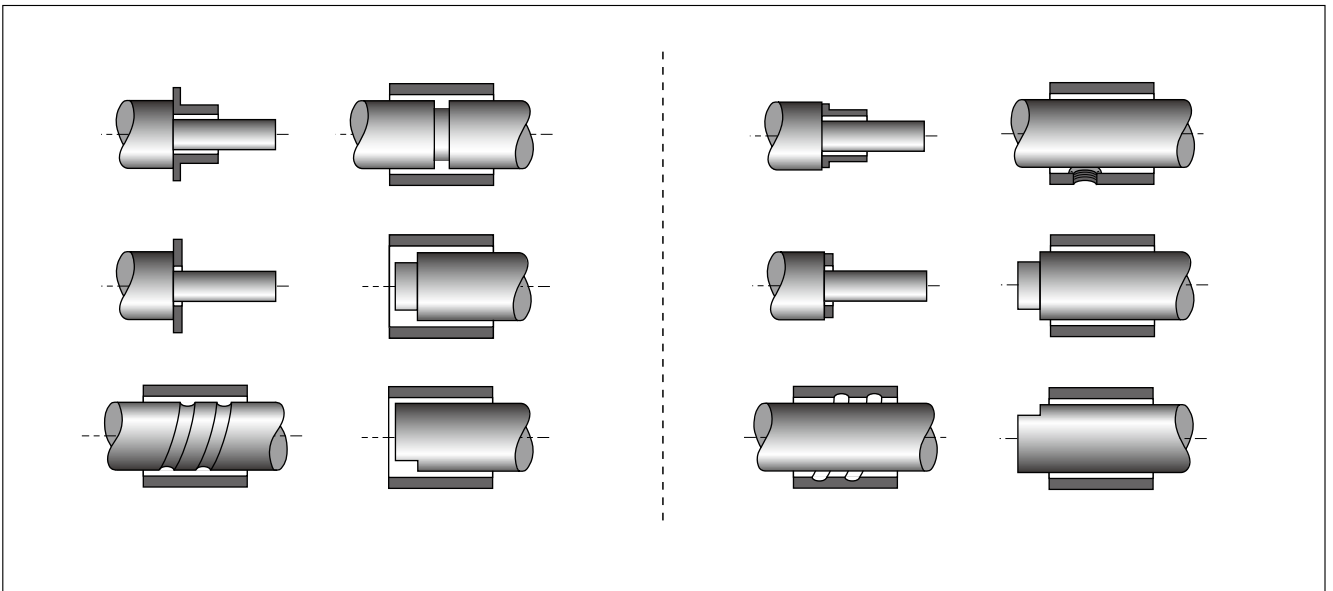

密封 Sealing

金属塑料基自润滑轴承允许一些不会损害轴承表面材料的异物进入，但当异物的侵入增加或高磨损型物质进入时应当安装核实的密封圈以提高轴承的使用寿命。

If increased levels of contamination occur or the bearing is used in an aggressive environment, the bearing section should be protected from dust and containment. The normal solution is to re-design the surrounding structure so that the contamination cannot reach the bearing section. If the contamination is critical, a collar of grease or a shaft seal is recommended.

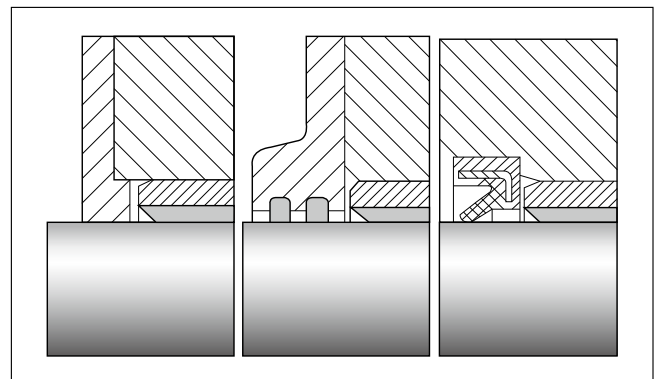

SFB

嘉善宝林轴承有限公司 **JIASHAN SFB BEARING CO., LTD.**

浙江省嘉善县罗星街道金秀路81号
No.81 Jinxiu Road, Luoxing Street, Jiashan
County, Zhejiang Province, China.

Mob: 0086-13967338018
Tel: 0086-573-84668895

E-mail: sfb@sfbearing.com
Web: www.sfbearing.com